

## Testing:

Once connected to the 240V UPS backup mains supply, ensure the UPS unit has been allowed to charge. Conduct the following tests:

- For the first test, the lamp must remain illuminated for at least 2 hours after disconnection from the mains supply with the UPS running from the battery.
- Subsequent tests require the unit to illuminate for at least 90 minutes. The results of all tests are required to be recorded in a service logbook, which is to be kept on-site at all times. If the unit fails to remain illuminated for the requisite time, remedial action must be taken to repair the situation and once completed, the unit must pass a subsequent test. For more specific information, please refer to the current edition of the AS 2293.3 Standard.

## Cleverfit Maintenance:

### Lamp Replacement:

- Use only the LED Lamp Strip recommended in the Spares List of this instruction.
- To replace the lamp strip, remove the 4 self-tapping screws, remove the 2 threaded screws and remove the body cover. Disconnect the signal cable and install the new lamp strip.

## Trouble Shooting:

Below are a list of common problems and their possible causes.

- Fault:** The Status LED indicator and main lamp is not illuminated.  
**Check:** A.C. is connected and is turned on. Test Switch for damage.
- Fault:** Lamp does not illuminate in emergency mode.  
**Check:** A.C. is connected. Lamp is correctly inserted. UPS battery condition

## Rated Emergency Lumen Output in accordance with AS2293.1 (refer to spacing tables for installation positions): N/A for LCFLED-SP-UPS

C0=E2 C90=E2

## Warranty:

For Product Warranty information and Terms and Conditions of Sales please refer to our website <http://clevertronics.com.au/terms-conditions-sale-australia-nz/>

# L10™ Cleverfit LED Exit - UPS

## Installation & Maintenance Instruction Leaflet



Designed in Australia to comply with the requirements of the AS2293.3\ AS2293.1-2005

### Victoria (Head Office & Manufacturing)

195 Chesterville Rd  
Moorabbin VIC 3189  
Phone: +61 3 9559 2700  
Fax: +61 3 9559 2799

### New South Wales

Phone: +61 2 8805 6400  
Fax: +61 2 8805 6444

### Queensland

Phone: +61 7 3442 9700  
Fax: +61 7 3442 9777

### South Australia/Northern Territory

Phone: +61 8 8301 8800  
Fax: +61 8 8351 8286

### Western Australia

Phone: +61 8 9248 3720  
Fax: +61 8 9248 3725

### New Zealand

Phone: +64 800 548 448

## Models: LCFLED-xx-yy-zz-UPS

### Testing:

DALI Comp. yy = DALI

### Options:

Custom Option zz = SP  
Running Man zz = R  
Theatre xx = TH

## Spare Parts:

8002430 – PCA: Duris P5 6 LED Strip

8002331 – PCA: DLED Cleverfit L10 Drive


## Important:

It is illegal for anyone, except for a licensed electrician to install or maintain this product. Before installation, ensure that the electricity supply has been switched off and isolated. Installation must be carried out in accordance with the relevant Australian and International Standards.

The L10 Cleverfit LED Exit (LCFLED) can be installed either Ceiling or Wall Mounted and can be mounted perpendicular to a wall using the (optional) Cleverfit Cantilever Bracket. The LCFLED uses a “slide connect bracket base” that is mounted and wired into position first. The main body can be installed once the base is wired or later to avoid damage during the construction phase. Please follow the steps below to install the Cleverfit Exit:

- 
- DIMENSIONS (mm)**
- 355
- 80
- 315

### Mounting Bracket - front view

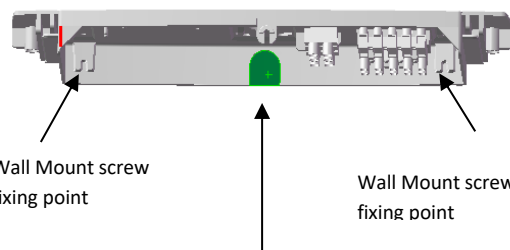

High temperature Nickel Cadmium batteries

Snap in opal diffuser


Drop-in legend insert, (Complete with both Pictograph & EXIT directional options)

Tamper-proof legend cover (Patented)

Long Life LED Lamp mounted on a replaceable light bar

Light weight and durable ABS body

Universal slide connect mounting bracket suits wall or ceiling

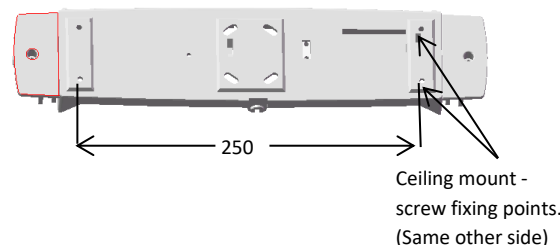

To change an Exit legend insert first remove the diffuser. The clear tamper proof cover is held in place by 3 locking tabs in the top inside area of the diffuser. Use a tool to disengage and push the locking tabs through to release the cover and remove the insert, replacing it with the desired one. When double sided is required remove the cardboard insert from the second side when adding decal.

### DAI EM Option

Fittings with part numbers containing -DALI are fitted with DALI modules (nodes) that facilitate connection and integration to 3<sup>rd</sup> Party Lighting Control Systems. The -DALI fitting will be addressed and configured into the control system by the Lighting Control System Commissioning Technicians and not Clevertronics.

State	LED Operation
Commissioned/ Un-commissioned	LED on Solid (Green)
“IDENTIFY COMMAND”	Fitting goes off for 10 seconds

A 2-way “figure 8” cable and terminal block facilitates the connection to the DALI network. DALI connections are marked as Da Da.

To confirm operation of the fitting the Lighting Control System can only use the status query type command. To “test” the sign this status query will need to be synchronised with the formal test of the UPS from its battery source. The sign will report a fault if the LED lamp bar is not illuminated.

**DO NOT run a Start Function Test or Start Duration Test command.** If either of these is run, the fitting will go into test mode and the fitting will switch off as it will be internally disconnected from main power and there is no battery so the LED lamp bar won't run – the unit will report a failed test. This condition cannot be rectified and the fitting will report this forever as it can never pass a test of this type.

## UPS Cleverfit Wiring and Connecting arrangements

## 240V AC, Static Inverter and UPS Applications

