



ARGOPLUS-600-CC-SEN-L10-HVG

Argonaut Plus 600mm Weatherproof Emergency Batten, L10 Nanophosphate, Switchable Colour, Combine Control, Motion Sensor, Zoneworks HIVE



PRODUCT INFORMATION	
Product Code	ARGOPLUS-600-CC-SEN-L10-HVG
MIC	AUB00000029801
Product Description	Argonaut Plus 600mm Weatherproof Emergency Batten, L10 Nanophosphate, Switchable Colour, Combine Control, Motion Sensor, Zoneworks HIVE
Mounting Method	Surface Mount/Suspension
Product Construction ¹	Recyclable UV Stabilised Polycarbonate (PC) Base with Stainless Steel Clips (SS304)
Diffuser Material	Recyclable UV Stabilised Polycarbonate (PC)
UL Flammability Rating	UL94 - V2 Self-extinguishing Polycarbonate (PC)
Halogen Free	Yes
Dimensions L x W x H	655mm x 160mm x 105mm
Weight	1.712kg
Ingress Protection (IP) Rating	IP65
Impact Protection (IK) Rating ²	IK08
Operating Temperature	0°C to 40°C
Supply Voltage	220-240V~ 50Hz
Power Factor	0.90 @ default
Supply Current	107mA +/-20mA
Inrush Current (Max)	23.23A<800µs
Earth Leakage	0.40mA

GENERAL LIGHTING - SPECIFICATION	
Colour Temperature	Switchable between 3000K / 4000K (Default) / 5700K
Colour Rendering Index (CRI)	≥ 85 (4000K), >80 (3000K & 5700K)
LED Colour Consistency	3 SDCM
Short Term Light Modulation (PstLM)	≤ 1.0
Stroboscopic Visibility Measure (SVM)	≤ 0.4
Flicker Free ³	Yes
Luminaire Output Configuration	Fixed Single Output
Total Lumen Output	2351 lm (126.4 lm/W) @ default (refer to next page for details)
Power Consumption	18.6W@ default (refer to next page for details)
Rated LED lifetime ⁴	L70/B50 Ta 40 °C: Reported >54,000h, Projected 173,050h L80/B20 Ta 40 °C: Reported >54,000h, Projected 98,700h L90/B10 Ta 40 °C: Reported 47,100h, Projected 47,100h
Driver ⁵	LED Driver -Mustang Pro 50W, EM550, SEN, CC, HIVE
Sensor Capability	Microwave Sensor - High/Low, On/Off, Combine Control



ARGOPLUS-600-CC-SEN-L10-HVG

Argonaut Plus 600mm Weatherproof Emergency Batten, L10
Nanophosphate, Switchable Colour, Combine Control, Motion
Sensor, Zoneworks HIVE

EMERGENCY LIGHTING - SPECIFICATION


Emergency Operating Mode	Sustained
Emergency Testing System	Zoneworks HIVE (RF) 2.4GHz
Battery	Lithium Nanophosphate, 3.3V 5000mAh
Battery Configuration	Integral Battery
Battery Charging Method	Intelligent Current Limited Constant Voltage
AS/NZS 2293 Classification	C0=D40 C90=D25

PRODUCT INFORMATION - COMPLIANCE

Green Building Schemes ⁶	Compliant with Green Star Flicker, CRI and MacAdam/SDCM Requirements
Applicable Standards	AS/NZS 3820, AS CISPR 15, AS/NZS 2293.3, AS 60598.2.22
Compliance Marking (RCM)	

REPLACEMENT PARTS

Part Number	Description
AUN00000000401	240V Driver
AUN00000000401	Emergency Driver
8002751	240V LED Strip
1530230	Battery
1190132	Sensor

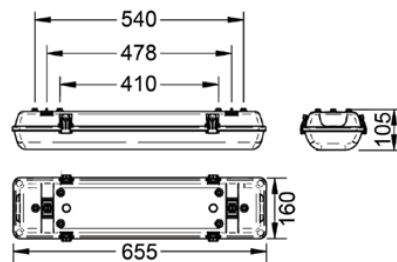

Power Consumption & Lumen Output	Output (700mA)				
	Max Charge, Lamp On	Standby Charge, Lamp On	Standby Charge, Lamp Min. 10%	Standby Charge, Lamp Off	Lumen Output
3000K	21.6W	19.3W	3.2W	0.7W	2192 lm
4000K (Default)	20.9W	18.6W	3.2W	0.7W	2351 lm
5700K	21.6W	19.3W	3.2W	0.7W	2304 lm

¹ All plastic materials will degrade under UV exposure over time, resulting in potential yellowing and surface degradation. UV stabilised materials are generally suited to indoor or sheltered environments with indirect UV exposure, while UL 746C – F1 rated UV resistant materials are suitable for outdoor applications with direct exposure to UV and moisture, providing enhanced resistance and reducing the rate of UV-induced ageing.

² When luminaire is ceiling mounted using appropriate fixings in accordance with the product instruction.

³ An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and PstLM value is ≤ 1.0 .

⁴ The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator.

⁵ Products fitted with the Mustang Pro combo driver have two active (mains-230V) connections. All operating current is supplied via Lem (Permanent Active, unswitched) only and shall be sized accordingly. Lsw (Switched Active, control only) is a mains-voltage control line and carries no load.

⁶ Designed to meet the applicable building scheme requirements at the document version date. For full details, refer to the relevant building scheme specification.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.



ARGOPLUS-600-CC-SEN-L10-HVG

Argonaut Plus 600mm Weatherproof Emergency Batten, L10
Nanophosphate, Switchable Colour, Combine Control, Motion
Sensor, Zoneworks HIVE