




# CBULK-HVG

CLEVERTRONICS CLP BULK-LITE  
WEATHERPROOF EMERGENCY LUMINAIRE

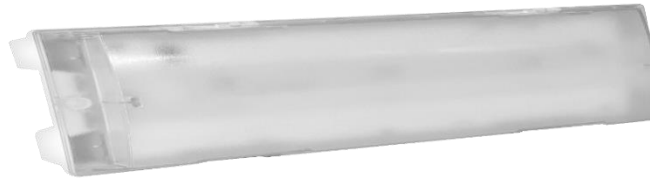

PRODUCT INFORMATION					
Part Number	CBULK-HVG				
MIC	UKS02820100002				
Description	CLP Bulklite Weatherproof Emergency Light				
Construction	Base Material: Polycarbonate Diffuser Cover Material: Polycarbonate				
Mounting	Surface Mount				
Dimensions L x W x H	346mm x 132mm x 86mm				
Weight	1.2kg				
Operating Mode	Non-Maintained – Can be adjusted to Maintained via Jumper				
Testing System	Zoneworks XT HIVE (RF)				
Battery Type & Manufacturer	Lithium Iron Phosphate (LiFePO <sub>4</sub> ), Clevertronics				
Charging Method	Intelligent current limited constant voltage				
Lamp(s)	LED module, L80/B20, 100,000hrs @ Ta 30c 6500K, Ra>80				
Diffuser	EXIT decals available separately				
Operating Voltage	220-240V AC; 50Hz				
Power Consumption	0.7Watts (Standby), 4.0Watts (Maintained Standby), 5.0Watts (Max)				
Total lumen output	395lm (Emergency) 395lm (Maintained)				
Inrush Current (Max)	19.4A/134μs				
Rated Emergency Duration	180 minutes				
IP Rating	IP65				
IK Rating	IK08				
Operating temperature	0°C to 40°C				
Protection	<ul style="list-style-type: none"><li>• Battery overvoltage &amp; overcurrent protection</li><li>• Battery deep discharge protection</li><li>• Supply voltage polarity reversal protection</li><li>• Battery short-circuit protection (charging will resume upon removal of fault)</li></ul>				
Luminaire Classification	<table border="1"><tr><td>X</td><td>0</td><td>ADF</td><td>180</td></tr></table>	X	0	ADF	180
X	0	ADF	180		
Conformity	BS EN 60598-2-22, BS 5266				
Compliance Marking					

\*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.



**CBULK-HVG**  
CLEVERTRONICS CLP BULK-LITE  
WEATHERPROOF EMERGENCY LUMINAIRE

**REPLACEMENT PARTS**

<b>PART NUMBER</b>	<b>DESCRIPTION</b>
1553231	Battery
8050790	LED Strip
8003842	Emergency Driver
8003330	Node

\*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.