




CFLLED-HVG

Supalite Twin Spot Emergency, Surface Mount, LP,
Zoneworks XT Hive 2.4GHz



PRODUCT INFORMATION

Part Number	CFLLED-HVG
MIC	AUE02910010001
Description	Supalite Twin Spot Emergency, Surface Mount, LP, Zoneworks XT Hive 2.4GHz
Construction	Polycarbonate
Mounting	Surface Wall Mount & supplied with flex and plug (the flex and plug can be removed to allow for a hard-wired connection)
Dimensions	Main enclosure - 282mm (W) x 137mm (H) x 64mm (D) Total height including LED Heads 225mm
Weight	1.3kg
Operating Mode	Non-maintained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Iron Phosphate, 3.2V 6400mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	2 x LED Heads (adjustable), 185lm per lamp head
Operating Voltage	240V AC; 50Hz
Power Consumption	0.7W (Standby), 3.0W (Max)
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C ₀ =N/A C ₉₀ =N/A
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550230	BATT:LP 3.2V 6400mAh.200mm lead.Brkt.
1100954	LED Flood Lamp Head Ass, Cable & Cnnctr, Left
1100955	LED Flood Lamp Head Ass, Cable & Cnnctr, Right
8002953	Driver Pack: PCA: xFLLED #CT10142-L9 250-550mA
8003560	PCA: V5 2.4GHz RF Node CT10816-A1 Int Ant

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order




CFLLED-HVG

Supalite Twin Spot Emergency, Surface Mount, LP,
Zoneworks XT Hive 2.4GHz

Spacing Guidance

Polar curve for a single LED lamp head

Luminous emittance 1:

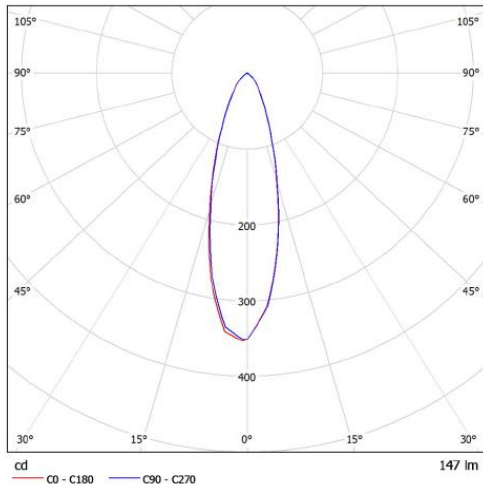

Isolux plot and value table for a 10m x 10m area serviced by an LFLLED with each LED lamp head tilted down 30°, rolled out 30°. LFLLED mounted on the wall at a height of 3m (values in lux).

