




## CLIFE-PRO-HV-BLK

### CLEVERTRONICS LP LIFELIGHT PRO RECESSED EMERGENCY LIGHT - BLACK

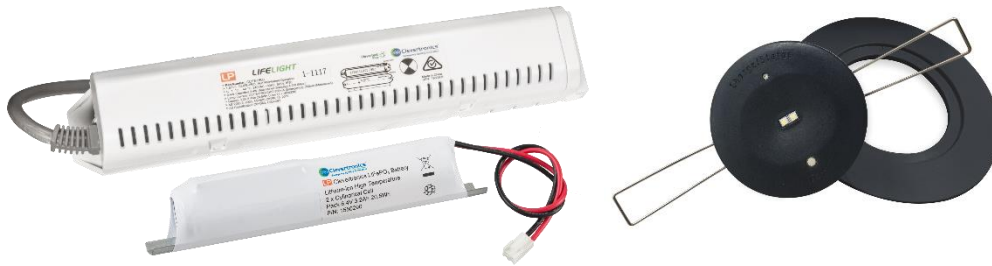

#### PRODUCT INFORMATION

Part Number	CLIFE-PRO-HV-BLK
MIC	AUT02810110002
Description	LP Premium LifeLight PRO, High Performance, Recessed Emergency Light, Black
Construction	ABS head, PC/ABS control gear
Mounting	Recessed mount
Dimensions L x W x H	232mm x 40mm x 40mm (Control pack) 60mm head diameter (95mm with adaptor plate)
Ceiling Hole Cut-Out	51mm, 85mm (with adaptor plate)
Minimum Ceiling Depth	200mm, 120mm (with adaptor plate)
Weight	0.8kg
Operating Mode	Non-maintained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Iron Phosphate, 3.2V 6400mAh
Charging Method	Intelligent current limited constant voltage
Lamp(s)	Dual LED (Lifetime warranty on the lamp head and loom assembly)
Operating Voltage	240V AC; 50Hz (supplied with a 2 core and earth flex and plug)
Power Consumption	0.7 Watts (Standby), 3.0 Watts (Max)
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C <sub>0</sub> =D80 C <sub>90</sub> =D80
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

#### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550230	BATT:LP 3.2V 6400mAh.200mm lead.Brkt.
8003081	LED: PCA: LLPRO HEAD Alum #CT10640-D4 - GW CSHPM 'LT'
AUM02870070001 CLIFE-PRO-CKIT-HV	Lifelight Pro, Control Only, LP, HV (incl. HV Node)
8003191	PCA: RF Node CT10678-A9 Int Antenna LLPro

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.