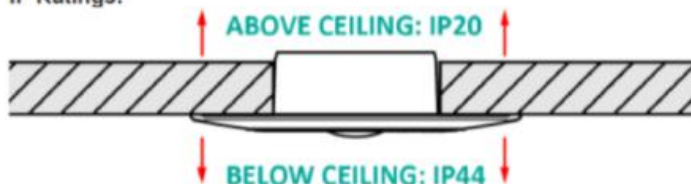# CLIFE-PRO-RECSP-HVG
Clevertronics Lifelight PRO, Recessed Mount, CLP, Zoneworks XT Hive 2.4GHz

PRODUCT INFORMATION

Part Number	CLIFE-PRO-RECSP-HVG
MIC	UKT02820030001
Description	Lifelight Pro IP44 Splashproof Emergency, Recessed Mount, CLP, Zoneworks XT Hive 2.4GHz
Construction	PC/ABS Head
Mounting	Recessed Ceiling
Dimensions L x W x H	232mm x 40mm x 40mm (Control pack) 60mm Head diameter
Cut-Out	51mm
Minimum Depth	200mm
Weight	1.1kg
Operating Mode	Non-Maintained
Testing System	Zoneworks XT HIVE (RF) 2.4GHz
Battery	Lithium Iron Phosphate, 3.2V 6400mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	Dual LED (Lifetime warranty on the lamp head and loom assembly)
Operating Voltage	240V AC; 50Hz
Power Consumption	0.7W (Standby), 3.0W (Max)
Total Lumen Output	364lm
Rated Emergency Duration	180 minutes
IP Rating	IP44 (parts below ceiling), IP20 (parts above ceiling), see image below
Operating Temperature	0˚C to 40˚C (LifeLight Head) 0˚C to 60˚C (Driver)
Protection	• Battery overvoltage & overcurrent protection • Battery deep discharge protection • Supply voltage polarity reversal protection • Battery short-circuit protection (charging will resume upon removal of fault) • Kit box (enclosure) of lamp controlgear provides protection against accidental contacts with live parts

Luminaire Classification	X	0	ADF	180	

IP Ratings:

ABOVE CEILING: IP20

BELOW CEILING: IP44

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
3730042	Battery
1100765	LED Head Assembly
UKM02870030001 CLIFE-PRO-CKIT-HVG-475	Driver Pack
8003330	HVG Node

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.