




CLIFE-RECSP-D2

Lifelight IP44 Splashproof Emergency, Recessed Mount, CLP, DALI Emergency

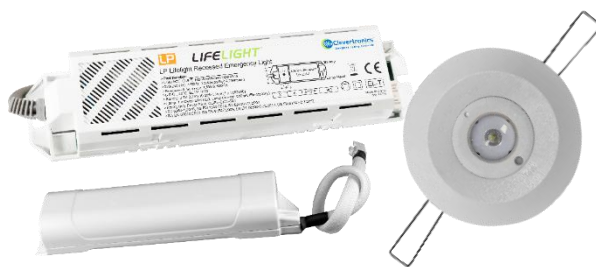

PRODUCT INFORMATION					
Part Number	CLIFE-RECSP-D2				
MIC	UKT00000019701				
Description	Lifelight IP44 Splashproof Emergency, Recessed Mount, CLP, DALI Emergency				
Construction	PC/ABS Head				
Dimensions L x W x H	232mm x 51mm x 42mm (Control Pack) 95mm Head Diameter				
Ceiling Hole Cut-Out	80mm				
Minimum Ceiling Depth	120mm				
Operating Mode	Non-Maintained				
Testing System	DALI-2				
Battery Type & Manufacturer	Lithium Iron Phosphate (LiFePO ₄), 3.2V 3200mA (With Battery Sleeve), Clevertronics				
Charging Method	Intelligent Current Limited Constant Voltage				
Lamp(s)	1 x LED				
Operating Voltage	220-240V AC; 50Hz				
Supply Current	TBC				
Power Factor	TBC				
Power Consumption	1.4 Watts (Standby), 4.7 Watts (Max)				
Inrush Current (Peak/Duration)	0.3A/3668µs				
Earth Leakage	N/A				
Total Lumen Output	189lm (Emergency)				
Rated Emergency Duration	180 Minutes				
IP Rating	IP44 (Parts Below Ceiling) IP20 (Parts Above Ceiling), See Image Below				
Operating temperature	0°C to 40°C				
Luminaire Classification	X	0	ADF	180	
Conformity	BS EN 60598-2-22, BS 5266				
Compliance Marking					

REPLACEMENT PARTS	
PART NUMBER	DESCRIPTION
1550092	Battery
1100764	LED Panel
UKM02270030002	Emergency Driver
8003062	Node

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

IP Ratings:

