



CLIFE-RECSP-HVG-BLK

Lifelight IP44 Splashproof Emergency, Recessed Mount, LP, Zoneworks HIVE, Black



PRODUCT INFORMATION

Part Number	CLIFE-RECSP-HVG-BLK
MIC	AUD02920070001
Description	Lifelight IP44 Splashproof Emergency, Recessed Mount, LP, Zoneworks HIVE, Black
Construction	PC/ABS Head
Mounting	Recessed Ceiling
Dimensions L x W x H	232mm x 51mm x 42mm (Control Pack) 95mm Head Diameter
Ceiling Hole Cut-Out	80mm
Minimum Ceiling Depth	120mm
Operating Mode	Non-Maintained
Testing System	Zoneworks HIVE (RF) 2.4GHz
Battery	Lithium Iron Phosphate, 3.2V 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	Single LED (Lifetime Warranty on the Lamp Head and Loom Assembly)
Operating Voltage	240V AC; 50Hz
Supply Current	0.026A
Power Factor	0.73
Power Consumption	1.3 Watts (Standby), 4.5 Watts (Max)
Inrush Current (Peak/Duration)	0.3A/3668µs
Earth Leakage	N/A
IP Rating	IP44 (Parts Below Ceiling) IP20 (Parts Above Ceiling), See Image Below
Operating Temperature	1°C to 40°C
AS2293 Classification	C0=D50 C90=D50
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

REPLACEMENT PARTS


PART NUMBER	DESCRIPTION
1550010	Battery
1100762	LED Panel
AUM02970020001	Emergency Driver
8003560	Node



CLIFE-RECSP-HVG-BLK

Lifelight IP44 Splashproof Emergency, Recessed Mount, LP,
Zoneworks HIVE, Black

IP Ratings:

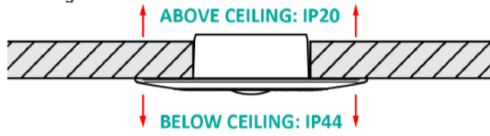

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order