




CLIFE-RECSP-HVG

Lifelight IP44 Splashproof Emergency, Recessed Mount, CLP, Zoneworks XT Hive, including optional Corridor lens

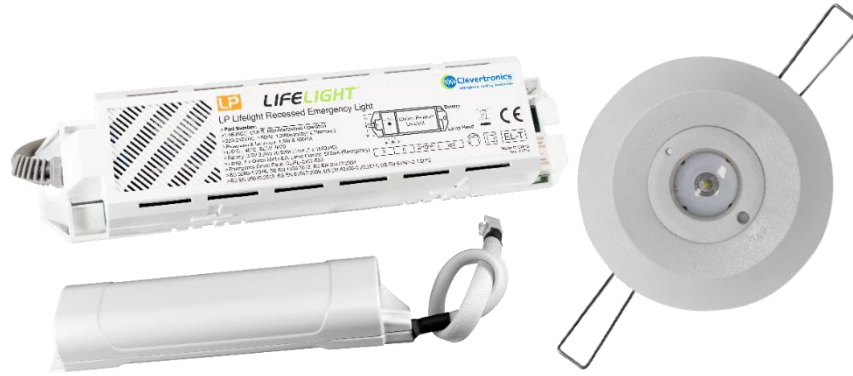

| PRODUCT INFORMATION | |
|-----------------------------|--|
| Part Number | CLIFE-RECSP-HVG |
| MIC | UKD0282002002 |
| Description | Lifelight IP44 Splashproof Emergency, Recessed Mount, CLP, Zoneworks XT Hive, including optional Corridor lens |
| Construction | PC/ABS head |
| Dimensions L x W x H | 232mm x 51mm x 42mm (Control pack) 95mm Head diameter |
| Ceiling Hole Cut-Out | 85mm |
| Minimum Ceiling Depth | 120mm |
| Weight | 0.8kg |
| Operating Mode | Non-maintained |
| Testing System | Zoneworks XT HIVE (RF) |
| Battery Type & Manufacturer | Lithium Iron Phosphate (LiFePO4), 3.2V 3200mA (with battery sleeve), Clevertronics |
| Charging Method | Intelligent current limited constant voltage |
| Lamp(s) | 1 LED |
| Operating Voltage | 220–240V AC; 50Hz |
| Rated Supply Current | 26mA (Standby), 46mA (Max) |
| Power Consumption | 1.4W (Standby), 4.7W (Max) |
| Power Factor | 0.73 |
| Inrush Current (Max) | 12.093A |
| Earth Leakage | 0.357mA |
| Total lumen output | 189lm (Area Lens - fitted), 171lm (Corridor Lens – supplied in box) |

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.




CLIFE-RECSP-HVG

Lifelight IP44 Splashproof Emergency, Recessed Mount, CLP, Zoneworks XT Hive, including optional Corridor lens

PRODUCT INFORMATION

| | | | | | |
|--------------------------|---|-----|-----|-----|-----|
| Rated Emergency Duration | 180 minutes | | | | |
| IP Rating | IP44 (parts below ceiling) IP20 (parts above ceiling), see image below | | | | |
| Viewing Distance | | | | | |
| Operating temperature | 0°C to 40°C | | | | |
| Protection | <ul style="list-style-type: none">• Battery overvoltage & overcurrent protection• Battery deep discharge protection• Supply voltage polarity reversal protection• Battery short-circuit protection (charging will resume upon removal of fault)• Kit box (enclosure) of lamp control gear provides protection against accidental contacts with live parts | | | | |
| Luminaire Classification | <table border="1"><tr><td>X</td><td>0</td><td>ADF</td><td>180</td></tr></table> | X | 0 | ADF | 180 |
| X | 0 | ADF | 180 | | |
| Conformity | BS EN 60598-2-22, BS 5266 | | | | |
| Compliance Marking | | | | | |

IP Ratings:

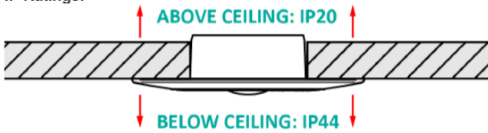

REPLACEMENT PARTS

| PART NUMBER | DESCRIPTION |
|----------------|-------------------|
| 1553092 | Battery |
| 1100764 | LED Head Assembly |
| UKM02870010002 | Emergency Driver |
| 8003330 | Node |

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.