




CLIFE-RECSP

Lifelight IP44 Splashproof Emergency, Recessed Mount, CLP, Clevertest Plus, including optional Corridor lens

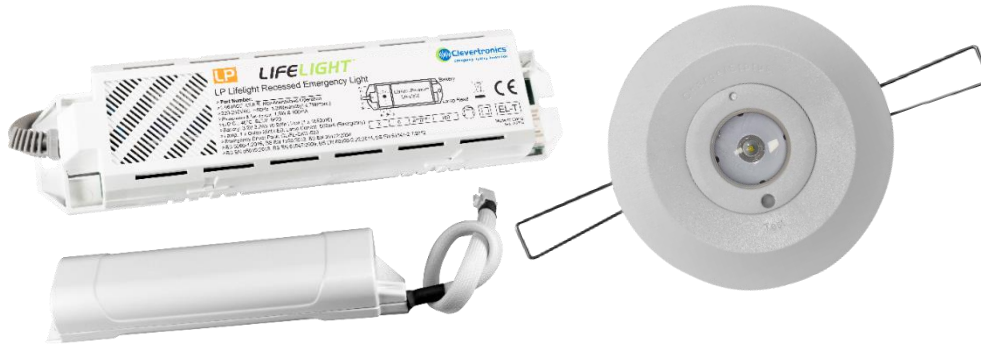

PRODUCT INFORMATION	
Part Number	CLIFE-RECSP
MIC	UKT02320030002
Description	Lifelight IP44 Splashproof Emergency, Recessed Mount, CLP, Clevertest Plus, including optional Corridor lens
Material	PC/ABS head
Mounting	Recessed Ceiling
Dimensions L x W x H	232mm x 51mm x 42mm (Control pack) 95mm Head diameter
Ceiling Hole Cut-Out	85mm
Minimum Ceiling Depth	120mm
Weight	0.8kg
Operating Mode	Non-maintained
Testing System	Clevertest Plus Enabled (Not activated by default)
Battery	Lithium Iron Phosphate, 3.2V 3200mAh
Charging Method	Intelligent current limited constant voltage
Lamp(s)	1 LED
Operating Voltage	220-240V AC; 50Hz
Supply Current	36mA (Standby), 46mA (Max)
Power Consumption	1.0W (Standby), 4.2W (Max)
Inrush Current (Peak/Duration)	0.3A / 3668µs
Earth Leakage	N/A
Operating Temperature	0°C to 40°C
Maximum Case Temperature (TC)	50°C (no heatsink required for lamp control gear)
Total Lumen Output	189lm (Area Lens - fitted), 171lm (Corridor Lens - supplied in box)
IP Rating	IP44 (parts below ceiling) IP20 (parts above ceiling), see image below
Emergency Duration	180 Minutes
Compliance Marking	
Luminaire Classification	X 0 AD 180
Conformity	BS EN 60598-2-22, BS 5266




CLIFE-RECSP

Lifelight IP44 Splashproof Emergency, Recessed Mount, CLP, Clevertest Plus, including optional Corridor lens

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1553092	Battery
1100760	LED Assembly
UKM02370020003 CLIFE-CKIT-500	Emergency Driver

IP Ratings:

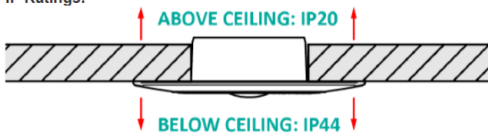

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order