




CWFLED-HVG

Supalite IP65 Weatherproof Twin Spot Emergency, Surface Mount, LP,
Zoneworks XT Hive 2.4GHz



PRODUCT INFORMATION

Part Number	CWFLED-HVG
MIC	AUE02920010001
Description	Supalite IP65 Weatherproof Twin Spot Emergency, Surface Mount, LP, Zoneworks XT Hive 2.4GHz
Construction	Polycarbonate
Mounting	Surface wall mount (hard wired supply connection)
Dimensions	Main enclosure - 380mm (W) x 190mm (H) x 130mm (D) Total height including LED Heads 310mm.
Weight	3.6 kg
Operating Mode	Non-maintained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Iron Phosphate, 6.4V 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	2 x LED Heads (adjustable), 600lm per lamp head
Operating Voltage	240V AC; 50Hz
Power Consumption	1.2W (Standby), 5.4W (Max)
IP Rating	IP65
Operating Temperature	0°C to 40°C
AS2293 Classification	C ₀ =N/A C ₉₀ =N/A
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550290	BATT:LP 6.4V 3.2Ah.200mm lead.Stick.Brkt (QTY 2)
1100550	WP Led Head, c/w Led's & Loom, Gland (QTY 2)
CCPLED-18V625C-CKIT-HVG	LED Power Pack, 18V 625mA, IP Loom, LP, HVG (incl. Hive node)
8003570	PCA: V5 2.4GHz RF Node CT10816-A1 Int Ant Horiz

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order




CWFLED-HVG

Supalite IP65 Weatherproof Twin Spot Emergency, Surface Mount, LP,
Zoneworks XT Hive 2.4GHz

Isolux plot and value table for a 30m x 30m area serviced by a Weatherproof Supalite with each LED lamp head tilted down 30°, rolled out 30°. The Weatherproof Supalite mounted on the wall at a height of 3m and 6m (values in lux).

CWFLED@3m

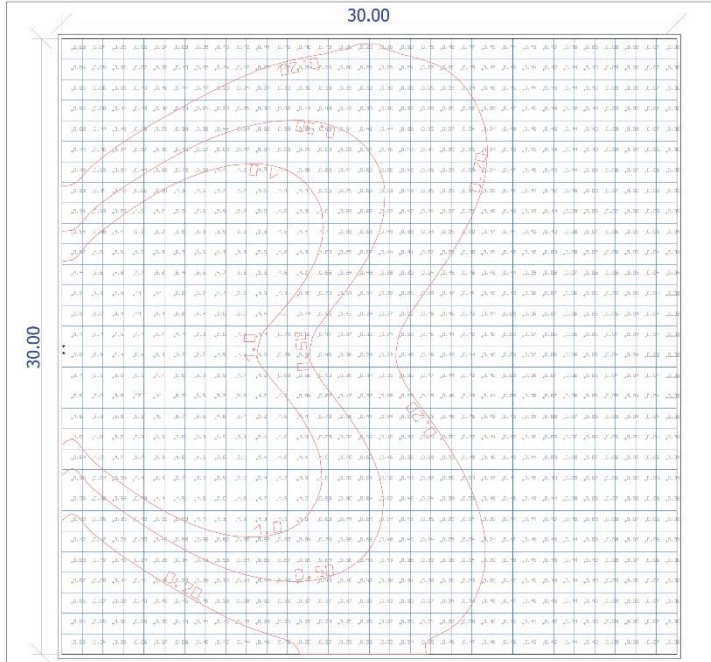

CWFLED@6m

