


ARGONAUT WALL




External Wall Mount Emergency Light

Crafted from marine-grade die-cast aluminium housing and an emergency classification of up to D125, the Argonaut Wall luminaire is meticulously engineered to light up external egress paths. Equipped with a daylight sensor, they will automatically turn on or off depending on the ambient light levels, ensuring optimal visibility and safety.

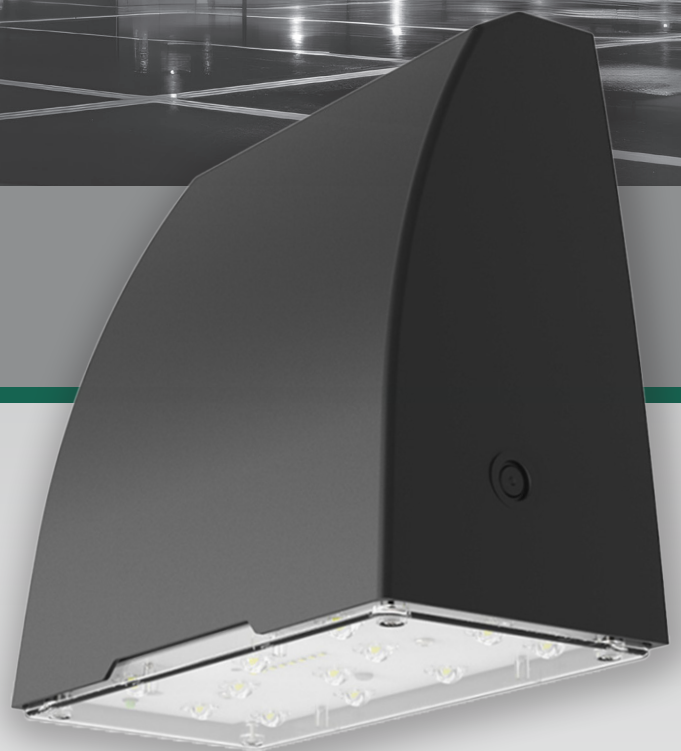


Applications

- | | |
|---|---|
|  Office Buildings |  Car Parks |
|  Public Amenities |  Railway Stations |
|  Schools |  Sports Facilities |



Features and Benefits

- AS/NZS 2293.3 compliant
- D40 / D125 emergency classification
- IP65 Ingress Protection
- IK10 Impact Rating
- Daylight sensor for automatic on/off functionality
- Lithium Iron Phosphate battery
- DALI and Zoneworks test options

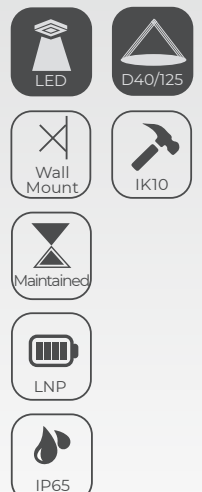

ARGONAUT WALL

ORDERING INFORMATION		EMERGENCY (LP)	STANDARD
TEST OPTIONS / PART#	Standard - White	ARGOWALL-LP	ARGOWALL
	DALI Driver	ARGOWALL-DD-LP	ARGOWALL-DD
	Clevertest Plus System Compatible	Yes	-
	DALI	ARGOWALL-LP-D2	-
	Zoneworks® XT Hive	ARGOWALL-LP-HVG	-
Carton Quantity	1		
Weight - Single (Carton)	4.6kg	4.5kg	
Dimensions (W x H x D)	305mm x 310mm x 155mm		

TECHNICAL SPECIFICATIONS	EMERGENCY (LP)	STANDARD
Construction - Body	Die Cast Aluminium	
Construction - LED Cover	Polycarbonate	
Voltage (V) Frequency (Hz)	220-240V (50Hz)	
Power Consumption (Standby / Lamp On)	1.1W / 15.7W	1.0W / 14.2W
Lamp	LED Module, 4000K, 50000hrs (L70/B50, Ta40°C)	
Total Lumen Output	1646lm	
Operating Temperature	0°C to 40°C	
Ingress Protection Rating (IP)	IP65	
Impact Rating (IK)	IK10	
Sensor	Integrated photocell for automatic on/off operation depending on ambient light levels	


EMERGENCY SPECIFICATIONS	EMERGENCY (LP)
Operating Mode	Maintained
Battery Type	Lithium Iron Phosphate
Voltage (V) / Capacity (mAh)	3.2V / 6400mAh
Charging Method	Intelligent current limited constant voltage

CLASSIFICATION	EMERGENCY (LP)
C0	D40
C90	D125

SPACING TABLE AND MOUNTING HEIGHTS – AS / NZS 2293.1:2008 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
D125	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	33.0	35.4	36.7	37.7	38.6

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

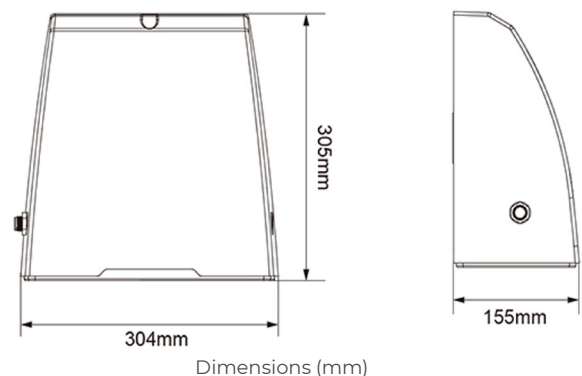

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
_PRODUCT SHEETS – Argonaut Wall March 2024

