

LIFELIGHT IP44 SPLASHPROOF



Recessed Lifelight with Splashproof Head



The Lifelight IP44 Splashproof is a recessed emergency luminaire that is designed for use in applications where an IP44 rating is required.

Complete with Lithium Iron Phosphate batteries to ensure low maintenance requirements.

Applications

-  Bathrooms
-  Aquatic Centres
-  Schools
-  Public Amenities
-  Gyms

Features and Benefits

- AS/NZS 2293.3 compliant
- LED lamp
- IP44
- D40 and D50 emergency classification
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or black as standard with other colours available on request



LIFELIGHT IP44 SPLASHPROOF

ORDERING INFORMATION		LP	L10
TEST OPTIONS / PART #	Standard - White	CLIFE-RECSP	LLIFE-RECSP
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-RECSP-DALI	LLIFE-RECSP-DALI
	Zoneworks® XT Hive	CLIFE-RECSP-HV	LLIFE-RECSP-HV
Carton Quantity	1		
Weight - Single (Carton)	0.8kg		
Dimensions (L x W x H)	232mm X 51mm X 42mm - Control Pack 95mm - Head Diameter		

POWER, LAMPS AND BATTERY	LP	L10
Power Consumption (Standby / Max)*	1W / 4.2W	1W / 4.2W
Lamp(s)	Single LED	Single LED
Battery	Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V 3200mAh	3.3V 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage	


TECHNICAL SPECIFICATIONS	LP	L10
Operating Mode	Non-Maintained	
Voltage (V) (Frequency (Hz))	240V AC; 50Hz	
Operating Temperature	1°C to 40°C	
Ingress Protection Rating (IP) (Parts Below Ceiling)	IP44	
Ingress Protection Rating (IP) (Parts Above Ceiling)	IP20	

CLASSIFICATION*	LP	L10
C0	D50	D40
C90	D50	D40

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

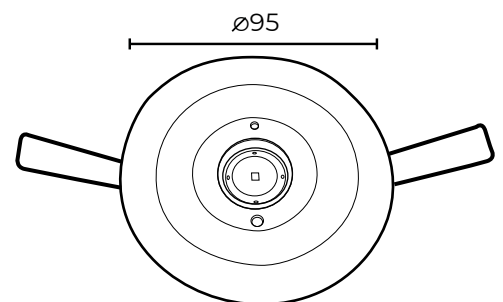


Ceiling hole cut-out = 80mm

Dimensions (mm)

Note: Spacing for mounting heights higher than 7.0m will depend on number of fittings used as the average of 0.5lx will change. For specific requirements, different corridor widths and lxx spacing tables please contact Clevertronics (info@clevertronics.com.au).

To determine actual spacings refer to section, 4.6.1.3 Illuminance calculations, of AS/NZS2293.1:2018.

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

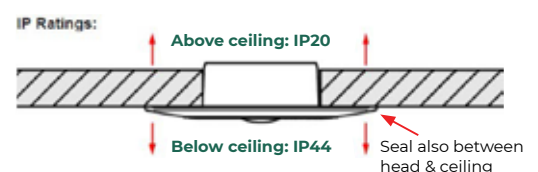

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
_PRODUCT SHEETS – ANZ Lifelight IP44 Splash Proof 04OCT22

