

LIFELIGHT PRO CYLINDER SURFACE MOUNT EMERGENCY



Premium LED Emergency Light

The Lifelight Pro Cylinder is an energy efficient, lithium powered LED emergency light in a small and sleek architectural design. The D80 classification of the Lifelight Pro provides an amazing 60% increase in emergency lighting coverage compared to many existing emergency lights on the market.

Suitable in a variety of applications the Lifelight Pro Cylinder will provide outstanding performance and too many will reduce installation and maintenance costs.

Applications

- | | | | |
|--|------------------|---|----------------|
|  | Office Buildings |  | Showrooms |
|  | Galleries |  | Retail Outlets |
|  | Apartments |  | Theatres |



Features and Benefits

- AS/NZS 2293.3 compliant
- D80 emergency classification
- Low 0.4W power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or black (other colours on request)



LIFELIGHT PRO CYLINDER SURFACE MOUNT EMERGENCY

ORDERING INFORMATION		LP	L10
TEST OPTIONS / PART #	Standard - White	CLIFE-PRO-SMC	LLIFE-PRO-SMC
	Standard - Black	CLIFE-PRO-SMC-BLK	LLIFE-PRO-SMC-BLK
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-PRO-SMC-DALI	LLIFE-PRO-SMC-DALI
	Zoneworks® XT Hive	CLIFE-PRO-SMC-HV	LLIFE-PRO-SMC-HV
Carton Quantity	1 Piece	1 Piece	
Weight - Single	1.9kg	1.9kg	
Dimensions (L x W x H)	128mm (D) x 245mm	128mm (D) x 245mm	

POWER, LAMPS AND BATTERY	LP	L10
Power Consumption (Standby / Max)	0.4W / 2.7W	
Lamp(s)	2 x LED	
Battery	Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 6400mAh	3.3V / 5000mAh
Charging Method	Intelligent Current Limited Constant Voltage	


TECHNICAL SPECIFICATIONS	CLASSIFICATION	
	LP	L10
Operating Mode	Non-Maintained	
Voltage (V) Frequency (Hz)	220-240V (50Hz)	
Operating Temperature	1°C to 40°C	
IP Rating (IP)	IP20	
	C0	D80
	C90	D80

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

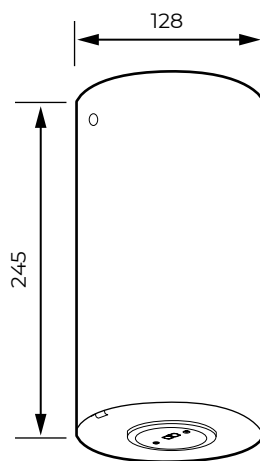

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
_PRODUCT SHEETS – ANZ Lifelight Pro Cylinder Surface Mount 04OCT22

