

LIFELIGHT PRO IP44 SPLASHPROOF





Recessed Lifelight Pro with Splashproof Head



The Lifelight Pro IP44 Splashproof is an energy efficient, Lithium powered LED emergency light for use in applications where an IP44 rating is required.

Featuring a sleek design and D80 emergency classification, the Lifelight Pro IP44 Splashproof will provide outstanding performance and reduce installation and maintenance costs.


Applications

-  Bathrooms
-  Aquatic Centres
-  Schools
-  Public Amenities
-  Gyms

Features and Benefits


- AS/NZS 2293.3 compliant
- LED lamp
- IP44 splashproof
- D80 emergency classification
- Low 0.4W power consumption
- Lithium Iron Phosphate or Nanophosphate battery
- Clevertest Plus System compatible

 LED

 IP44

 Recessed

 D80

 Non-Maintained

 LFP

 LNP



LP LITHIUM IRON PHOSPHATE
PREMIUM
PREMIUM PROJECT PERFORMANCE



L10 LITHIUM NANOPHOSPHATE
OPTIMUM
NOTHING ELSE COMPETES WITH NANOPHOSPHATE*

LIFELIGHT PRO IP44 SPLASHPROOF

ORDERING INFORMATION		LP	L10
TEST OPTIONS / PART #	Standard - White	CLIFE-PRO-RECSP	LLIFE-PRO-RECSP
	Clevertest Plus System Compatible		Yes
	DALI	CLIFE-PRO-RECSP-DALI	LLIFE-PRO-RECSP-DALI
	Zoneworks® XT Hive	CLIFE-PRO-RECSP-HV	LLIFE-PRO-RECSP-HV
Carton Quantity	1		
Weight - Single (Carton)	0.8kg		
Dimensions (L x W x H)	232mm x 51mm x 42mm (Control Pack) 60mm (Head Diameter)#		

POWER, LAMPS AND BATTERY	LP	L10
Power Consumption (Standby / Max)*	0.4W / 2.7W	0.4W / 2.7W
Lamp(s)	Dual LED	Dual LED
Battery	Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 6400mAh	3.3V / 5000mAh
Charging Method	Intelligent Current Limited Constant Voltage	


TECHNICAL SPECIFICATIONS	CLASSIFICATION*	
	LP	L10
Operating Mode	Non-Maintained	
Voltage (V) (Frequency (Hz))	240V AC; 50Hz	
Operating Temperature	1°C to 40°C	
Ingress Protection Rating (IP) (Parts Below Ceiling)	IP44	
Ingress Protection Rating (IP) (Parts Above Ceiling)	IP20	

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>



Ceiling hole cut-out = 51mm
Dimensions (mm)

Due to the small head and ceiling cut-out, access from behind/above the ceiling is required for installation.

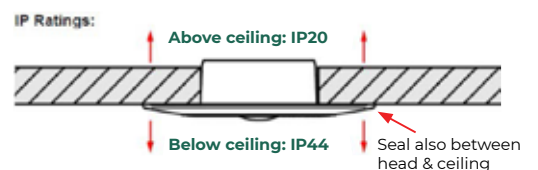

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products. All features and specifications are subject to change without prior notice.
_PRODUCT SHEETS – ANZ Lifelight IP44 Splash Proof 04OCT22

