

ULTRABLADE PRO RECESSED EXIT LIGHT



Recessed Architectural Blade Exit Light

The Ultrablade Pro Exit is designed to satisfy architectural requirements in recessed ceiling applications where a higher level of sophistication is required.

Scratch resistant, fingerprint free decals and a reduced halo effect on the diffuser completes the visual appeal of the Ultrablade Pro.

Applications



Features and Benefits

- Tested to BS EN 60598-2-22
- Compliant to EN1838 and ISO7010
- Low 1.8W standby power consumption
- Wall and ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- DALI® and Zoneworks® test options available
- Clevertest Plus System compatible



ULTRABLADE PRO RECESSED EXIT LIGHT


ORDERING INFORMATION		CLP	L10
TEST OPTIONS PART NO	Standard	CUBPRO	LUBPRO
	Clevertest Plus System Compatible	Yes	Yes
	DALI	CUBPRO-DALI	LUBPRO-DALI
	Zoneworks® XT Hive	CUBPRO-HVG	LUBPRO-HVG
	Theatre Version	CUBPRO-TH	LUBPRO-TH
Carton Quantity	5		
Weight - single (carton)	1.1kg (5.5kg)		
Dimensions (L x W x H)	317mm x 8.7mm x 157mm - Blade Assembly 385mm x 67mm - Cover Plate 350mm x 48mm - Ceiling Cutout		
Directional Options	All Directional Inserts Included (Excluding theatre versions)		
Directional Options (Theatre Only)	Add Suffix to Part No, Double Sided -DS, Left Arrow -RL, Right -RR, Up -RU, Down -RD. eg CUBPRO-SM-TH-DS-RL		

POWER, LAMPS AND BATTERY		CLP	L10
Power Consumption (Standby / Max)		1.8W / 3.9W	1.9W / 4.1W
Lamp(s)		100,000 Hour LED	
Battery		Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 1500mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage	
Rated Emergency Duration (mins)		180	

TECHNICAL SPECIFICATIONS		CLP	L10
Operating Mode		Maintained	
Voltage (V) Frequency (Hz)		220-240V (50Hz)	
Construction - Body / Diffuser		PC-ABS / PC	
Viewing Distance		30m	
Mounting Type		Single and Double Sided	
Operating Temperature		0°C to 40°C	
IP Rating (IP)		IP20	

LUMINAIRE CLASSIFICATION		CLP				L10			
Without Automatic Testing		X	1	AG	180	X	1	AG	180
With Automatic Testing		X	1	AFG	180	X	1	AFG	180

PROTECTION	
	Battery overvoltage & overcurrent protection
	Battery deep discharge protection
	Supply voltage polarity reversal protection
	Battery short-circuit protection (charging will resume upon removal of fault)

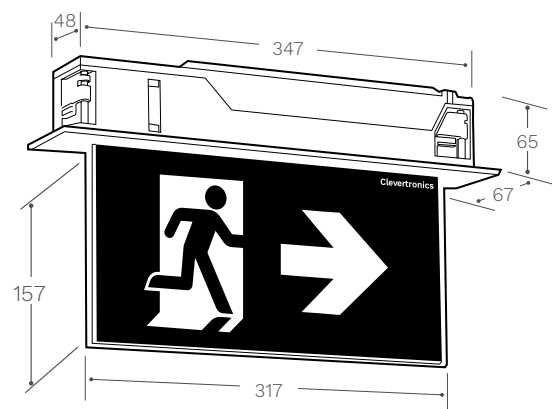

Dimensions (mm)

*Warranty information located at: <https://clevertronics.co.uk/product-warranty-statement/>

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

clevertronics.co.uk

362 Stockley Close, West Drayton, London UB7 9BL

Clevertronics International UK Ltd trading as Clevertronics, with registered number 11249539, whose registered office is at 843 Finchley Road London NW11 8NA. 248UK UK Catalogue 2021

