

VANDAL RESISTANT EXIT LIGHT



A Strong, Robust and Reliable Exit Light

The Clevertronics Vandal Resistant Exit luminaire is a high impact exit that utilises the Cleverfit Pro within a powder coated steel IK10 enclosure that is electrically isolated for ease of maintenance.

It provides an effective solution for prisons, correction facilities, train stations and other applications where impact resistance may be required.



Applications



Public Amenities



Schools



Stadiums



Train Stations



Car Parks



Correctional Facilities

Features and Benefits

- Tested to BS EN 60598-2-22
- Wall, ceiling and flag mount options
- All directional decals in one box
- Lithium Nanophosphate® battery
- DALI® and Zoneworks® test options available
- Clevertest Plus System compatible



VANDAL RESISTANT EXIT LIGHT


		L10		
ORDERING INFORMATION		CEILING MOUNTED	WALL MOUNTED	FLAG MOUNTED
PART NO	Standard	LVELED-CM	LVELED-WM	LVELED-FM
	Clevertest Plus System Compatible	Yes		
	DALI	LVELED-CM-DALI	LVELED-WM-DALI	LVELED-FM-DALI
	Zoneworks® XT Hive	LVELED-CM-HVG	LVELED-WM-HVG	LVELED-FM-HVG
Carton Quantity		1		
Weight		6.6kg		
Dimensions (L x W x H)		425mm x 100mm x 270mm		
Directional Options		All Directional Inserts Included		

POWER, LAMPS AND BATTERY		L10		
Power Consumption (Standby / Max)		3.6W / 5.6W		
Lamp(s)		100,000 hours		
Battery		Lithium Nanophosphate®		
Voltage (V) / Capacity (mAh)		3.3V / 2500mAh		
Charging Method		Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS		L10		
Operating Mode		Maintained		
Voltage (V) (Frequency (Hz))		220-240V (50Hz)		
Construction		Cleverfit PRO Inside Powder Coated Metal Frame and PC Diffuser		
Viewing Distance		30m		
Operating Temperature		0°C to 40°C		
Ingress Protection Rating (IP)		IP20		
Impact Rating (IK)		IK10		

LUMINAIRE CLASSIFICATION		L10		
Without Automatic Testing	X	1	AG	180
With Automatic Testing	X	1	AFG	180

PROTECTION	
Battery overvoltage & overcurrent protection	
Battery deep discharge protection	
Supply voltage polarity reversal protection	
Battery short-circuit protection (charging will resume upon removal of fault)	

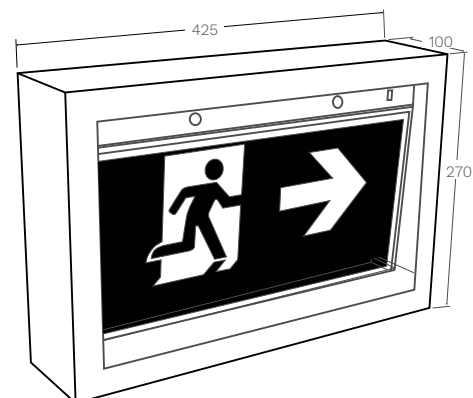

Dimensions (mm)

*Warranty information located at: <https://clevertronics.co.uk/product-warranty-statement/>

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

clevertronics.co.uk

362 Stockley Close, West Drayton, London UB7 9BL
 Clevertronics International UK Ltd trading as Clevertronics, with registered number 11249539, whose registered office is at 843 Finchley Road London NW11 8NA. 248UK UK Catalogue 2021

