

# JUMBO LED EXIT



## 40m Viewing Distance Exit

The Jumbo LED Exit caters for 40m viewing distance applications by using a 250mm high pictograph.

Featuring a robust steel housing with slide in diffusers and back plates for single and double sided configurations, the Jumbo LED Exit is easy to install as a wall or ceiling mounted exit.



### Applications

- |   |  |
|---|--|
|  Warehouses |  Stadiums       |
|  Factories  |  Halls          |
|  Car Parks  |  Train Stations |

### Features and Benefits

- AS/NZS 2293.3 compliant
- Wall and ceiling mount
- Can be rod or chain suspended
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible



**TRADE**  
SERIES  
THE TRADES CHOICE

**LP** LITHIUM IRON  
PHOSPHATE  
PREMIUM  
PREMIUM PROJECT PERFORMANCE

**L10** LITHIUM  
NANOPHOSPHATE®  
OPTIMUM  
NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

# JUMBO LED EXIT

ORDERING INFORMATION		TS	LP	L10
TEST OPTIONS / PART #	Standard	EJELED-40-LI	CJELED-40	LJELED-40
	Clevertest Plus System Compatible	No	Yes	Yes
	DALI	-	CJELED-40-DALI	LJELED-40-DALI
	Zoneworks® XT Hive	-	CJELED-40-HV	LJELED-40-HV
Carton Quantity	1			
Weight - Single (Carton)	7.3kg			
Dimensions (L x W x H)	630mm x 100mm x 320mm			
Directional Options	All Directional Inserts Included in the Box			

POWER, LAMPS AND BATTERY	TS	LP	L10
Power Consumption (Standby / Max)	5.3W / 6.5W	3.2W / 5.6W	
Lamp(s)	50,000 Hour LED	100,000 Hour LED	
Battery Type	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) (Frequency (Hz))	220-240V (50Hz)
Construction - Body / Diffuser	Powder Coated Metal / Acrylic
Viewing Distance	40m
Mounting Type	Wall & Ceiling Single & Double Sided
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP20 (IP66/67 Version Available)


CLASSIFICATION	TS	LP	L10
C0	D6.3	D6.3	D6.3
C90	E3.2	E3.2	E3.2

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
D6.3	8.5	8.8	8.9	9.1	9.1	9.2	9.1	9.0	8.7
E3.2	5.8	6.1	6.4	6.5	6.6	6.6	6.4	0.0	0.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux.  
Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1.  
Spacing classifications do not apply for theatre versions.

\*Warranty information located at:  
<https://clevertronics.com.au/warranty-statement/>

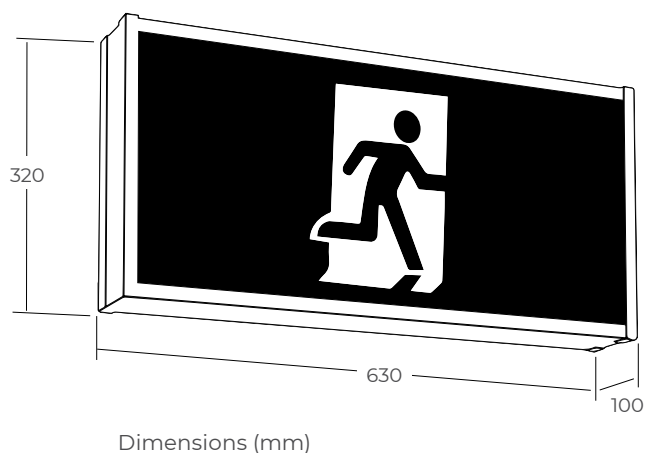

**clevertronics.co.nz**  
**clevertronics.com.au**

1 Caribbean Drive, Scoresby VIC 3179  
P +61 3 9559 2700 F +61 3 9559 2799 E [info@clevertronics.com.au](mailto:info@clevertronics.com.au)

Clevertronics is committed to continuously improving its products.  
All features and specifications are subject to change without prior notice.  
\_PRODUCT SHEETS – ANZ Jumbo LED 04OCT22

