

LIFELIGHT PRO WEATHERPROOF CYLINDER EMERGENCY



Premium Weatherproof LED Emergency Light

The Lifelight Pro Weatherproof Cylinder is an energy efficient, lithium powered LED emergency light in a small and sleek architectural design.

Suitable in a variety of applications the Lifelight Pro Weatherproof Cylinder will provide outstanding performance and too many will reduce installation and maintenance costs.

Applications

- | | | | |
|--|------------------|---|----------------|
|  | Office Buildings |  | Showrooms |
|  | Galleries |  | Retail Outlets |
|  | Apartments |  | Theatres |



Features and Benefits

- AS/NZS 2293.3 compliant
- D50 emergency classification
- Low 0.4W power consumption
- Lithium Nanophosphate® battery
- Clevertest Plus System compatible
- White or black (other colours on request)



LIFELIGHT PRO WEATHERPROOF CYLINDER EMERGENCY

ORDERING INFORMATION		L10 CEILING MOUNT	L10 WALL MOUNT
TEST OPTIONS / PART #	Standard - White	LWPLIFE-PRO-CM	LWPLIFE-PRO-WM
	Standard - Black	LWPLIFE-PRO-CM-BLK	LWPLIFE-PRO-WM-BLK
	Clevertest Plus System Compatible	Yes	
	DALI	LWPLIFE-PRO-DALI-CM	LWPLIFE-PRO-DALI-WM
	Zoneworks® XT Hive	LWPLIFE-PRO-HV-CM	LWPLIFE-PRO-HV-WM
Carton Quantity	1 Piece		
Weight - Single	3.8kg	5.0kg	
Dimensions (L x W x H)	186mm x 186mm x 294mm	260mm x 186mm x 287mm	

POWER, LAMPS AND BATTERY	L10
Power Consumption (Standby / Max)	0.4W / 2.7W
Lamp(s)	2 x LED
Battery	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.3V / 5000mAh
Charging Method	Intelligent Current Limited Constant Voltage


TECHNICAL SPECIFICATIONS	CLASSIFICATION
Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	0°C to 40°C
IP Rating (IP)	IP65
Impact Rating (IK)	IK10
	C0 D50
	C90 D50

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D50	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>



*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>



1

Product Configuration:

- 1 Ceiling Mounted
- 2 Wall Mounted

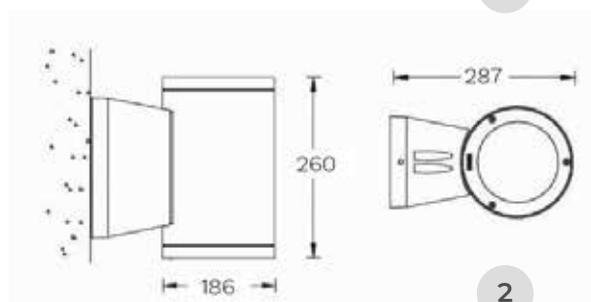

2

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
All features and specifications are subject to change without prior notice.
_PRODUCT SHEETS – ANZ Lifelight Pro Cylinder Surface Mount 04OCT22

