

LIFELIGHT



LED Recessed Emergency Light

The Lifelight provides a D40 emergency classification in a sleek architectural design. With market-leading lithium battery technology and energy efficient LEDs the Lifelight will deliver lower maintenance and energy costs.

As the first LED emergency light on the market, the Lifelight continues to lead the way in a variety of emergency lighting applications.

Applications



Office Buildings



Apartments



Schools



Retail outlets

TRADE
SERIES
THE TRADES CHOICE

LP LITHIUM IRON
PHOSPHATE
PREMIUM
PREMIUM PROJECT PERFORMANCE

L10 LITHIUM
NANOPHOSPHATE®
OPTIMUM
NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

Features and Benefits

- AS/NZS 2293.3 compliant
- D40 emergency classification
- 145mm adaptor plate for retrofitting
- Low power consumption
- Spring clips for easy installation
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or black as standard with other colours available on request



LIFELIGHT

ORDERING INFORMATION		TS	LP	L10
TEST OPTIONS / PART #	Standard - White	ELIFE-X-LI	CLIFE	LLIFE
	Standard - Black	-	CLIFE-BLK	LLIFE-BLK
	Clevertest Plus System Compatible	-	Yes	Yes
	DALI	-	CLIFE-DALI	LLIFE-DALI
	Zoneworks® XT Hive	-	CLIFE-HV	LLIFE-HV
Carton Quantity		10 Pieces		
Weight - Single (Carton)		0.5kg (8.2kg)	0.8kg (9.7kg)	
Dimensions (L x W x H) - Control Pack		232mm x 51mm x 42mm		
Dimensions - Head Diameter		95mm		
Dimensions - Adaptor Plate		145mm		
Ceiling Hole Cut-Out		85mm		
Minimum Ceiling Depth		120mm		


POWER, LAMPS AND BATTERY	TS	LP	L10
Power Consumption (Standby / Max)	0.3W / 1.3W	1.0W / 4.2W	1.0W / 4.2W
Lamp(s)	1 x LED		
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS		CLASSIFICATION		
		TS	LP	L10
Operating Mode	Non-Maintained	D40	D40	D40
Voltage (V) Frequency (Hz)	220-240V (50Hz)	D40	D40	D40
Operating Temperature	1°C to 40°C			
Ingress Protection Rating (IP)	IP20			

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

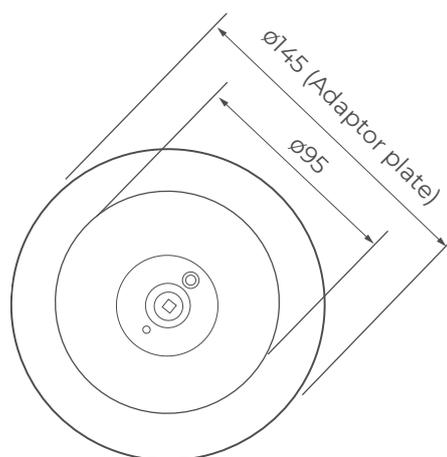

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
 All features and specifications are subject to change without prior notice.
 _PRODUCT SHEETS – ANZ Lifelight Recessed 04OCT22

