

CLEVERFIT EXIT LIGHT



LED Exit Suitable for All Applications

The Cleverfit exit light is a proven market leader that is known for its reliable, robust design, energy efficiency and quality lithium battery technology.

The Cleverfit can be either wall or ceiling mounted with directional decals for single and double-sided applications provided in each box.

Applications

-  Office Buildings
-  Schools
-  Factories
-  Retail outlets
-  Car Parks



Features and Benefits

- Tested to BS EN 60598-2-22
- Compliant to EN1838 and ISO7010
- Low 2.5W to 3.7W standby power consumption
- Wall and ceiling mount with easy slide connect
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- DALI® and Zoneworks® test options available
- Clevertest Plus System compatible



CLEVERFIT EXIT LIGHT

ORDERING INFORMATION		CLP		L10	
TEST OPTIONS PART NO	Standard	CCFLED		LCFLED	
	Clevertest Plus System Compatible			Yes	
	DALI	CCFLED-DALI		LCFLED-DALI	
	Zoneworks® XT Hive	CCFLED-HVG		LCFLED-HVG	
	Theatre Version	CCFLED-TH		LCFLED-TH	
Carton Quantity	5 pieces				
Weight - single (carton)	1.8kg (9kg)				
Dimensions (L x W x H)	355mm x 80mm x 215mm				
Directional Options	All Directional Inserts Included (Excluding theatre versions)				
Directional Options (Theatre Only)	Add Suffix to Part No, Double Sided -DS , Left Arrow -RL, Right -RR, Up -RU, Down -RD. eg CCFLED-TH-DS-RL				

* for additional variants please refer to the Clevertronics Product Guide or website.


POWER, LAMPS AND BATTERY		CLP		L10	
Power Consumption (Standby / Max)	3.7W / 4.9W		2.5W / 4.5W		
Lamp(s)	100,000 Hour LEDs				
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®		
Voltage (V) / Capacity (mAh)	3.2V / 1500mAh		3.3V / 2500mAh		
Charging Method	Intelligent Current Limited Constant Voltage				

TECHNICAL SPECIFICATIONS		CLP		L10	
Operating Mode	Maintained				
Voltage (V) Frequency (Hz)	220-240V (50Hz)				
Construction- Body / Diffuser	ABS / PC				
Viewing Distance	30m				
Mounting Type	Wall & Ceiling (Single & Double Sided)				
Operating Temperature	0°C to 40°C				
IP Rating (IP)	IP20 (Weatherproof Version Available)				

ACCESSORIES		CLP		L10	
Cantilever Bracket	CLVRBRT-CF-WP		CLVRBRT-CF-WP		
Wireguard (Wall Mount)	2530050		2530050		
Wireguard (Ceiling Mount)	2530110		2530110		

LUMINAIRE CLASSIFICATION		CLP				L10			
Without Automatic Testing	X	1	AG	180	X	1	AG	180	
With Automatic Testing	X	1	AFG	180	X	1	AFG	180	

PROTECTION	
Battery overvoltage & overcurrent protection	
Battery deep discharge protection	
Supply voltage polarity reversal protection	
Battery short-circuit protection (charging will resume upon removal of fault)	

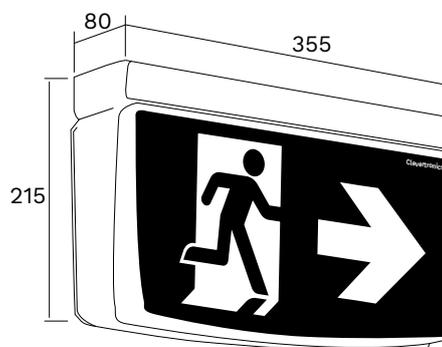

Dimensions (mm)

*Warranty information located at: <https://clevertronics.co.uk/product-warranty-statement/>

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

clevertronics.co.uk

362 Stockley Close, West Drayton, London UB7 9BL
 Clevertronics International UK Ltd trading as Clevertronics, with registered number 11249539, whose registered office is at 843 Finchley Road London NW11 8NA. 248UK UK Catalogue 2021

