

WEATHERPROOF EXIT LIGHT



Weatherproof and Easy to Install

The Weatherproof Universal Exit offers a cost-effective solution for applications that require an IP66/67 exit that can be either wall or ceiling mounted using single or double sided decals.



Applications

- | | |
|--|--|
|  Schools |  Public Amenities |
|  Factories |  Stadiums |
|  Car Parks |  Warehouses |

Features and Benefits

- Tested to BS EN 60598-2-22
- Wall or ceiling mount
- Can be rod or chain suspended
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- DALI® and Zoneworks® test options available
- Clevertest Plus System compatible
- Theatre version available

CLP LITHIUM IRON PHOSPHATE
PREMIUM
PROVEN PROJECT PERFORMANCE

L10 LITHIUM NANOPHOSPHATE®
OPTIMUM
NOTHING ELSE COMPETES WITH NANOPHOSPHATE®



WEATHERPROOF EXIT LIGHT

ORDERING INFORMATION		CLP	L10
PART NO	Standard	CWELED	LWELED
	Clevertest / Self-Test Capable	Yes	Yes
	DALI	CWELED-DALI	LWELED-DALI
	Zoneworks® XT Hive	CWELED-HVG	LWELED-HVG
Carton Quantity		4	
Weight - single (carton)		2.8kg (11.2kg)	
Dimensions (L x W x H)		410mm x 100mm x 272mm	
Directional Options		All Directional Inserts Included (Excluding theatre versions)	


POWER, LAMPS AND BATTERY		CLP	L10
Power Consumption (Standby/Max)		3.7W / 4.9W	3.6W / 4.5W
Lamp(s)		100,000 Hours LEDs	
Battery		Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 1500mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS		CLP	L10
Operating Mode		Maintained	
Voltage (V) Frequency (Hz)		220-240V(50Hz)	
Construction		Cleverfit Inside Glass Reinforced Nylon Base and PC Cover	
Viewing Distance		30m	
Mounting Type		Wall and Ceiling (Single and Double Sided)	
Operating Temperature		0°C to 40°C	
Ingress Protection Rating (IP)		IP66/67	
Impact Rating (IK)		IK10	

ACCESSORIES		CLP	L10
Cantilever Bracket		CLVBRT-CF-WP	

LUMINAIRE CLASSIFICATION		CLP				L10			
Without Automatic Testing	X	1	AG	180	X	1	AG	180	
With Automatic Testing	X	1	AFG	180	X	1	AFG	180	

PROTECTION	
Battery overvoltage & overcurrent protection	
Battery deep discharge protection	
Supply voltage polarity reversal protection	
Battery short-circuit protection (charging will resume upon removal of fault)	

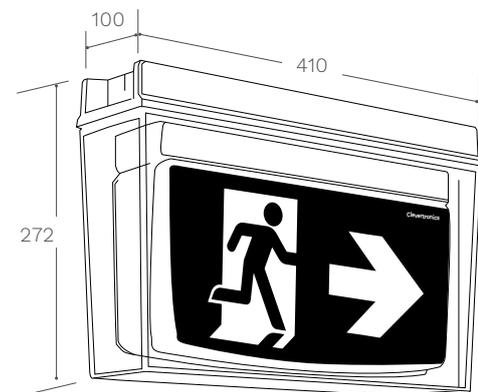

Dimensions (mm)

*Warranty information located at: <https://clevertronics.co.uk/product-warranty-statement/>

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

clevertronics.co.uk

362 Stockley Close, West Drayton, London UB7 9BL

Clevertronics International UK Ltd trading as Clevertronics, with registered number 11249539, whose registered office is at 843 Finchley Road London NW11 8NA. 248UK UK Catalogue 2021

