




DYGC-UP-CM-DS-RAOW

CleverEvac Dynamic Green Exit, Ceiling Mount, LP, Running Man Arrow One Way, Double Sided

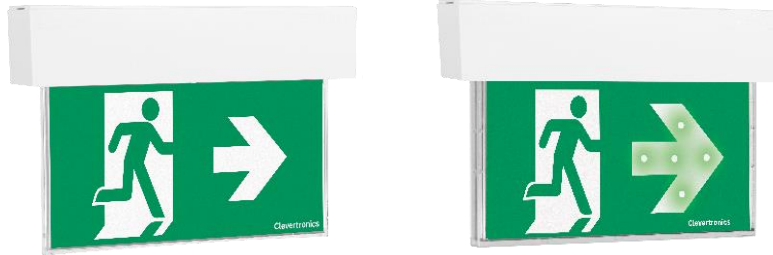

PRODUCT INFORMATION	
Part Number	DYGC-UP-CM-DS-RAOW
MIC	AUA02550720001
Description	CleverEvac Dynamic Green Exit, Ceiling Mount, LP, Running Man Arrow One Way, Double Sided
Construction	PC/ABS Body with PC Diffuser
Mounting	Ceiling Mount, Double Sided
Dimensions L x W x H	391mm x 90mm x 257mm
Weight	5.9 kg
Operating Mode	Maintained – sequencing inward green LEDs activated on VF/24V input trigger and capable of being activated in power-on and battery-backed mode, with the added functionality of Dynamic Green activation over the HIVE network. Dynamic Green default set to activate upon mains power fail.
Testing System	Manual
Battery	Lithium Iron Phosphate, 3.2V 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	Double Sided Pictograph, Two Elements (Running Man with Arrow)
Lamp(s)	LED Panel, 100,000 hours
Operating Voltage	220-240V; 50Hz
Power Factor	0.366
Supply Current	0.054A
Power Consumption	2.8W (Standby), 7.2W (Max)
Inrush Current (Peak/Duration)	15.9A / 140µs
Earth Leakage	0.328mA
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C ₀ =E5 C ₉₀ =C32
Viewing Distance	24m
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3, Codemark CM20237 (AUS), CM20236 (NZ)
Compliance Marking (RCM)	



DYGC-UP-CM-DS-RAOW

CleverEvac Dynamic Green Exit, Ceiling Mount, LP, Running Man
Arrow One Way, Double Sided

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550030	Battery
AUM02570020001	Driver Pack
N/A	Hive

Disclaimer: Clevertronics Pty Ltd is a vendor of CleverEVAC products. It is not a fire engineer or designer. It does not purport to recommend its products for use in any particular application or to achieve any particular outcome. Purchasers and users of its products must take their own steps to ensure compliance with statutory requirements, safe practice and suitable application of the products.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.