




DYRL-UP-RD

CLEVEREVAC DYNAMIC GREEN & RED X BLADE EXIT SIGN

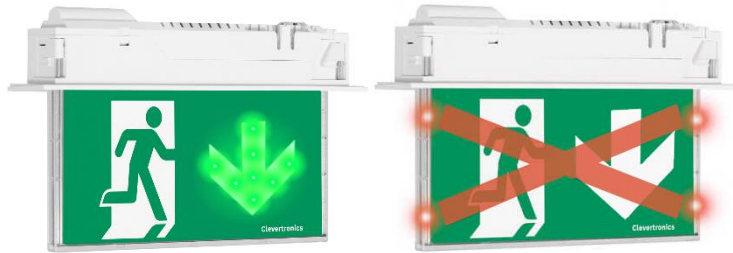

| PRODUCT INFORMATION | | | | | |
|-----------------------------|---|----|-----|----|-----|
| Part Number | DYRL-UP-RD | | | | |
| MIC | UKA01550070001 | | | | |
| Description | L10 Optimum CleverEVAC Dynamic Green and Red X Blade EXIT sign, with Volt Free (VF) & 24V interface for ON/OFF activation of Dynamic Green & Red X Enhancement | | | | |
| Construction | PC/ABS body with Acrylic diffuser | | | | |
| Mounting | Recessed, Single Sided | | | | |
| Dimensions L x W x H | 385mm x 67mm x 257mm | | | | |
| Weight | 3.3kg | | | | |
| Operating Mode | Maintained – Sequencing inward green LEDs or illuminated Red X with side flashing red LED's activated on VF/24V input trigger and capable of being activated in power-on and battery-backed mode | | | | |
| Testing System | N/A - Manual Test Switch | | | | |
| Battery Type & Manufacturer | Lithium Nanophosphate (LiFePO4), Clevertronics | | | | |
| Charging Method | Intelligent current limited constant voltage | | | | |
| Diffuser | Single sided Pictograph, two elements (Running Man with Arrow Down) | | | | |
| Lamp(s) | LED panel, 100,000 hours | | | | |
| Operating Voltage | 220-240V AC; 50Hz | | | | |
| Power Consumption | 1.7 Watts (Standby), 8.7 Watts (Max) | | | | |
| Viewing Distance | 30m | | | | |
| Rated Emergency Duration | 180 minutes | | | | |
| IP Rating | IP20 | | | | |
| Operating temperature | 0°C to 40°C | | | | |
| Protection | <ul style="list-style-type: none"> Battery overvoltage & overcurrent protection Battery deep discharge protection Supply voltage polarity reversal protection Battery short-circuit protection (charging will resume upon removal of fault) Kit box (enclosure) of lamp control gear provides protection against accidental contacts with live parts | | | | |
| Luminaire Classification | <table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td style="text-align: center;">X</td> <td style="text-align: center;">1</td> <td style="text-align: center;">AG</td> <td style="text-align: center;">180</td> </tr> </table> | X | 1 | AG | 180 |
| X | 1 | AG | 180 | | |
| Conformity | BS EN 60598-2-22, BS 5266 | | | | |

REPLACEMENT PARTS

| PART NUMBER | DESCRIPTION |
|--------------------------------|-------------|
| 1530250 | Battery 1 |
| 1530050 | Battery 2 |
| UKM01570010001 DYRL-UP-CKIT | Driver Pack |

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice