




DYRL-UP-WM-RU

CleverEvac Dynamic Red X Blade Exit, Wall Mount, L10 Nanophosphate, Running Man Arrow Up, Single Sided

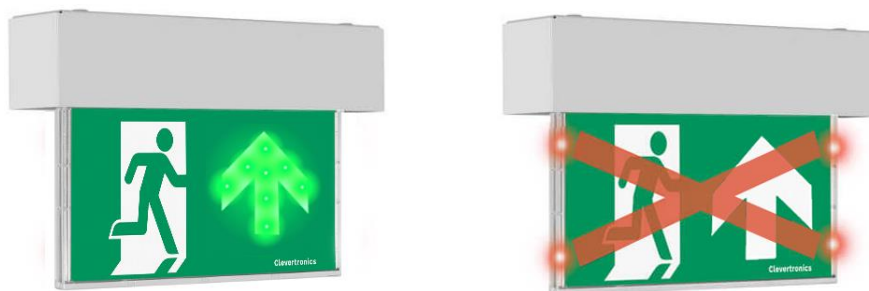

PRODUCT INFORMATION

Part Number	DYRL-UP-WM-RU			
MIC	UKA00000002501			
Description	CleverEvac Dynamic Red X Blade Exit, Wall Mount, L10 Nanophosphate, Running Man Arrow Up, Single Sided			
Construction	PC/ABS body with Acrylic diffuser			
Mounting	Ceiling Mount			
Dimensions L x W x H	391mm x 90mm x 257mm			
Weight	5.9kg			
Operating Mode	Maintained – Sequencing inward green LEDs or illuminated Red X with side flashing red LED's activated on VF/24V input trigger and capable of being activated in power-on and battery-backed mode			
Testing System	N/A - Manual Test Switch			
Battery Type & Manufacturer	Lithium Nanophosphate (LiFePO4), Clevertronics			
Charging Method	Intelligent current limited constant voltage			
Diffuser	Single sided Pictograph, two elements (Running Man with Arrow Up)			
Lamp(s)	LED panel, 100,000 hours			
Operating Voltage	220-240V AC; 50Hz			
Power Consumption	1.7 Watts (Standby), 8.7 Watts (Max)			
Inrush Current (Peak/Duration)	15.9A/140µs			
Earth Leakage	0.312mA			
Viewing Distance	30m			
Rated Emergency Duration	180 minutes			
IP Rating	IP20			
Operating temperature	0°C to 40°C			
Protection	<ul style="list-style-type: none">• Battery overvoltage & overcurrent protection• Battery deep discharge protection• Supply voltage polarity reversal protection• Battery short-circuit protection (charging will resume upon removal of fault)• Kit box (enclosure) of lamp control gear provides protection against accidental contacts with live parts			
Luminaire Classification	X	1	AG	180
Conformity	BS EN 60598-2-22, BS 5266			

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530250	BATT: L10 3.3V 5AH. SBS
1530050	BATT: L10 3.3V 2.5AH 70mm lead, no BRKT
UKM01570010001 DYRL-UP-CKIT	Dynamic Red, UB Pro, Control Only, L10

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice