



EWFLED

Supalite IP65 Weatherproof Twin Spot Emergency,
Surface Mount, Trade Series



PRODUCT INFORMATION

Part Number	EWFLED
MIC	AUE03520010001
Description	Supalite IP65 Weatherproof Twin Spot Emergency, Surface Mount, Trade Series
Construction	Polycarbonate
Mounting	Surface Wall Mount (Hard Wired Supply Connection)
Dimensions L x W x H	Main Enclosure - 380mm x 190mm x 130mm Total Height Including LED Heads 310mm
Weight	2.0kg
Operating Mode	Non-maintained
Testing System	Manual Test Switch
Battery	Lithium Iron Phosphate, 3.2V 3000mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	2 x LED Heads (Adjustable), 175lm Per Lamp Head
Operating Voltage	220-240V AC; 50Hz
Supply Current	TBC
Power Factor	TBC
Power Consumption	0.4W (Standby), 1.3W (Max)
Inrush current (Peak/Duration)	26.8A/42µs
Earth Leakage	0.013mA
IP Rating	IP65
Operating Temperature	0°C to 40°C
AS2293 Classification	C0=N/A C90=N/A
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1560156	Battery
1100550	LED Panel
8002976	Emergency Driver

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.




EWFLED

Supalite IP65 Weatherproof Twin Spot Emergency,
Surface Mount, Trade Series

Isolux plot and value table for a 20m x 12m area serviced by a Trade Series Weatherproof Supalite with each LED lamp head tilted down 30°, rolled out 30°. The Weatherproof Supalite mounted on the wall at a height of 3m and 6m (values in lux).

Mounting Height 3M:

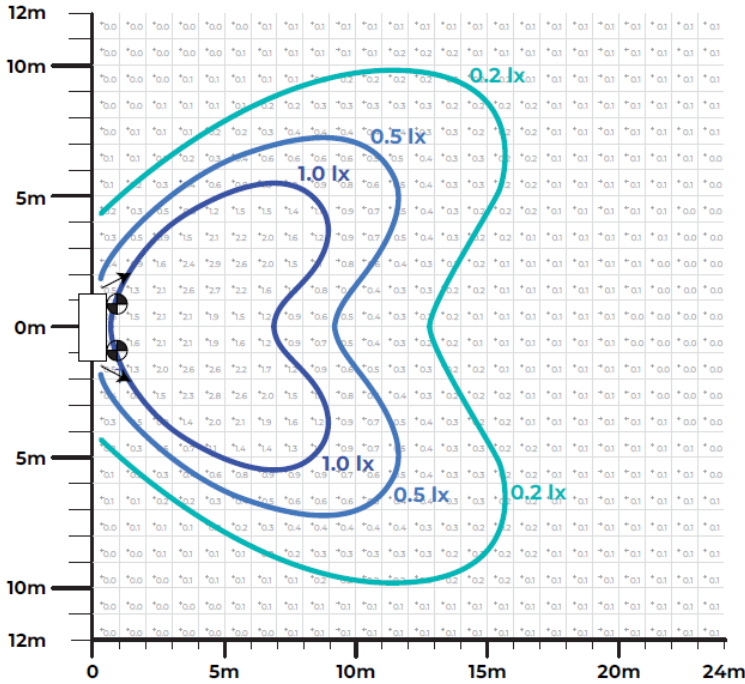

Mounting Height 6M:

