



FORM-16-REC-CM-RS-LP-BLK

Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, LP, Clevertest Plus, All Pictograms, Double Sided, Satin Black Frame



PRODUCT INFORMATION

Part Number	FORM-16-REC-CM-RS-LP-BLK
MIC	AUA02310970001
Description	Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, LP, Clevertest Plus, All Pictograms, Double Sided, Satin Black Frame
Construction	PCM Box with PC/Aluminium Extrusion Blade
Mounting	Recessed Ceiling Mount, Double Sided
Electrical Connection	Push Terminal
Operating Mode	Maintained
Testing System	Clevertest Plus Enabled (Not activated by default)
Diffuser	Polycarbonate
Battery	Lithium Iron Phosphate, 3.2V 1100mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)*	18 x LED, >100,000hrs (AS/NZS2293.3 LSL=73Y/00M)
Supply Voltage	220-240V~ 50Hz
Power Factor	0.28 (Standby, Maintained), 0.42 (Max)
Supply Current	19.91 (Standby, Maintained), 35.60 (Max) - (mA)
Power Consumption	1.2W (Standby), 3.3W (Max)
Inrush Current (Peak/Duration)	10A/144µs
Earth Leakage	0.35mA
Operating Temperature	1 °C - 40°C
IP Rating	IP20
Impact Rating	IK03
Viewing Distance	16m
AS2293 Classification	N/A
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking	



FORM-16-REC-CM-RS-LP-BLK


Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, LP, Clevertest Plus, All Pictograms, Double Sided, Satin Black Frame

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550150	Battery
AUM02370480001	Emergency Driver

PRODUCT INFORMATION – DIMENSIONS

Blade Assembly (LxWxH mm)	220 x 18 x 110
Body/Box (LxWxH mm)	225 x 63 x 53
Cover Plate (LxW mm)	277 x 99
Rod/Cable (LxDIAØ mm)	1500 x 5
Cut-Out (LxW mm)	230 x 65
Minimum Ceiling Depth (mm)	70
Weight (kg)	1.20

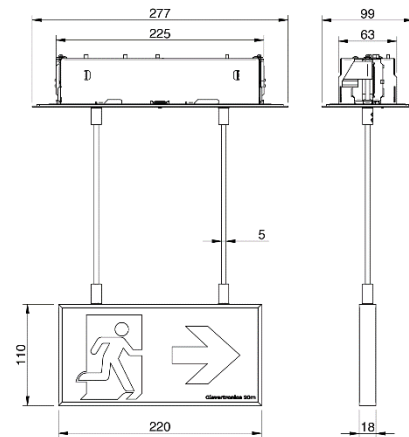

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order