



FORM-20-SM-CM-CS-L10-BLK

Form 20m Exit, Surface Ceiling Mount, Cable Suspended, L10 Nanophosphate, Clevertest Plus, Picto All, Double Sided, Brushed Aluminium Frame, Black



Cable Suspension

PRODUCT INFORMATION - GENERAL

Product Code	FORM-20-SM-CM-CS-L10-BLK
MIC	UKA00000028701
Description	Form 20m Exit, Surface Ceiling Mount, Cable Suspended, L10 Nanophosphate, Clevertest Plus, Picto All, Double Sided, Brushed Aluminium Frame, Black
Construction	Cast Aluminium Box with PC/Aluminium Extrusion Blade
Diffuser	Polycarbonate
Mounting	Surface Ceiling Mount, Double Sided
Electrical Connection	Screw Terminal

PRODUCT INFORMATION - SPECIFICATIONS

Viewing Distance	20m
Operating Mode	Maintained
Testing System	Clevertest Plus Enabled (Not Activated By Default)
Battery	Lithium Nanophosphate, 3.3V 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)*	18 x LED, 170,000 hours
Supply Voltage	220-240V~ 50Hz
Power Factor	0.28 (Standby, Maintained), 0.42 (Max)
Supply Current	18.61 (Standby, Maintained), 34.30 (Max) - (mA)
Inrush Current (Peak/Duration)	10A/144µs
Earth Leakage	0.35
Power Consumption	1.2W (Standby), 3.3W (Max)
Operating Temperature	0 °C - 40°C
IP Rating	IP20
Impact Rating	IK03
Rated Emergency Duration	180 Minutes
Escape Route Illumination	N/A
Escape Route Illumination Emergency Lumens	N/A



FORM-20-SM-CM-CS-L10-BLK

Form 20m Exit, Surface Ceiling Mount, Cable Suspended, L10
Nanophosphate, Clevertest Plus, Picto All, Double Sided, Brushed
Aluminium Frame, Black

PRODUCT INFORMATION - COMPLIANCE


Luminaire Classification	X	1	AG	180
Conformity	BS EN 55015, BS EN 61547, BS EN 61000-3-2, BS EN 61000-3-3, ETSI EN 301 489-1, ETSI EN 301 489-17, BS EN 1838, BS EN ISO 7010, BS EN 62471, BS EN 60598-2-22			
Compliance Marking	UK CA CE			

REPLACEMENT PARTS

COMPONENT	PART NUMBER & DESCRIPTION
1530050	Battery
UKM01370300001	Emergency Driver

PRODUCT INFORMATION - DIMENSIONS

Blade Assembly (LxWxH mm)	220 x 18 x 110
Body/Box (LxWxH mm)	220 x 58 x 45
Rod/Cable (LxDIAØ mm)	1500 x 1.4
Cut-Out (LxW mm)	N/A
Minimum Depth (mm)	0
Weight (kg)	0.90

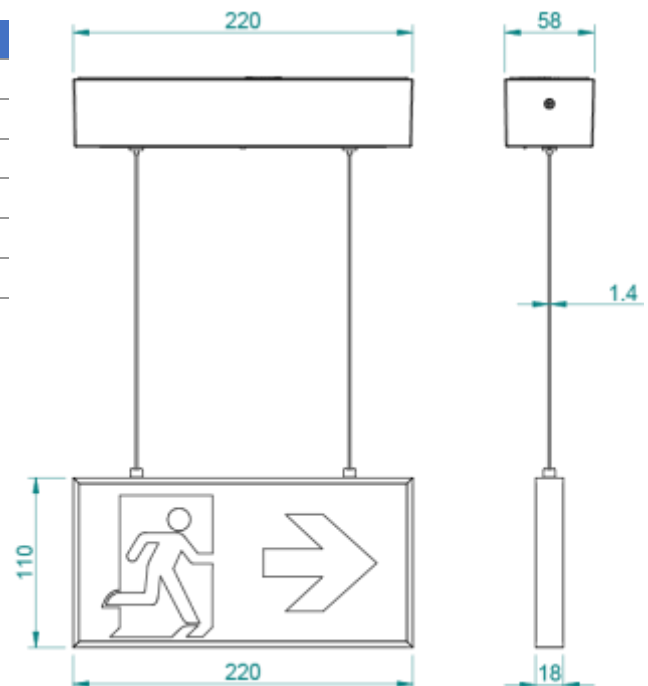

*The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications, or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order