



FORM-20-SM-CM-L10-D2

Form 20M Exit, Surface Ceiling Mount, L10 Nanophosphate, DALI-2
Emergency, All Pictograms, Double Sided, Brushed Aluminium
Frame



PRODUCT INFORMATION - GENERAL

Product Code	FORM-20-SM-CM-L10-D2			
MIC	UKA00000004101			
Description	Form 20M Exit, Surface Ceiling Mount, L10 Nanophosphate, DALI-2 Emergency, All Pictograms, Double Sided, Brushed Aluminium Frame			
Construction	Cast Aluminium Box with PC/Aluminium Extrusion Blade			
Diffuser	Polycarbonate			
Mounting	Surface Ceiling Mount, Double Sided			
Electrical Connection	Push Terminal			
Viewing Distance	20m			
Operating Mode	Maintained			
Testing System	DALI-2			
Battery	Lithium Nanophosphate, 3.3V 2500mAh, Clevertronics			
Charging Method	Intelligent Current Limited Constant Voltage			
Lamp(s)*	18 x LED, 170,000 hours			
Supply Voltage	220-240V~ 50Hz			
Supply Current	19mA			
Power Factor	0.28			
Total Lumen Output	TBA			
Power Consumption	1.5W (Standby), 3.6W (Max)			
Inrush Current (Peak/Duration)	10A / 144µs			
Earth Leakage	0.35			
IP Rating	IP20			
Impact Rating	IK03			
Operating Temperature	0°C to 40°C			
Rated Emergency Duration	180 Minutes			
Escape Route Illumination	N/A			
Escape Route Illumination Emergency Lumens	N/A			
Luminaire Classification	X	1	AFG	180
Compliance Marking				
Conformity	BS EN 55015, BS EN 61547, BS EN 61000-3-2, BS EN 61000-3-3, ETSI EN 301 489-1, ETSI EN 301 489-17, BS EN 1838, BS EN ISO 7010, BS EN 62471, BS EN 60598-2-22			



FORM-20-SM-CM-L10-D2


Form 20M Exit, Surface Ceiling Mount, L10 Nanophosphate, DALI-2
Emergency, All Pictograms, Double Sided, Brushed Aluminium
Frame

REPLACEMENT PARTS

COMPONENT	PART NUMBER & DESCRIPTION
1530050	Battery
UKM01270080002	Emergency Driver
8011956	LED Panel
8003068	Node

PRODUCT INFORMATION – DIMENSIONS

Blade Assembly (LxWxH mm)	220 x 18 x 110
Body/Box (LxWxH mm)	220 x 58 x 45
Rod/Cable (LxDIAØ mm)	N/A
Cut-Out (LxW mm)	N/A
Minimum Depth (mm)	N/A
Weight (kg)	0.80

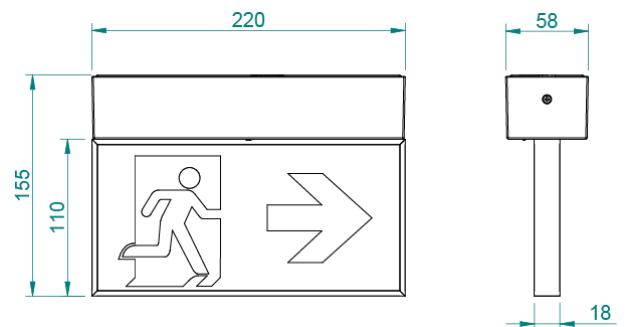

*The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications, or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order