



FORM-20-SM-CM-RS-L10-HVG

Form 20M Exit, Surface Ceiling Mount, Rod Suspended, L10 Nanophosphate, Zoneworks Hive, All Pictograms, Double Sided, Brushed Aluminium Frame



PRODUCT INFORMATION - GENERAL

Product Code	FORM-20-SM-CM-RS-L10-HVG			
MIC	UKA01810260002			
Description	Form 20M Exit, Surface Ceiling Mount, Rod Suspended, L10 Nanophosphate, Zoneworks Hive, All Pictograms, Double Sided, Brushed Aluminium Frame			
Construction	Cast Aluminium Box with PC/Aluminium Extrusion Blade			
Diffuser	Polycarbonate			
Mounting	Surface Ceiling Mount, Double Sided			
Electrical Connection	Screw Terminal			
Viewing Distance	20m			
Operating Mode	Maintained			
Testing System	Zoneworks HIVE (RF) 2.4GHz			
Battery	Lithium Nanophosphate, 3.3V 2500mAh			
Charging Method	Intelligent Current Limited Constant Voltage			
Lamp(s)*	18 x LED, 170,000 hours			
Supply Voltage	220-240V~ 50Hz			
Power Factor	0.42			
Supply Current	0.036A			
Inrush Current (Peak/Duration)	10A/144µs			
Earth Leakage	0.35			
Power Consumption	1.5W (Standby), 3.6W (Max)			
Operating Temperature	0°C to 40°C			
IP Rating	IP20			
Impact Rating	IK03			
Rated Emergency Duration	180 Minutes			
Luminaire Classification	X	1	AFG	180
Conformity	BS EN 55015, BS EN 61547, BS EN 61000-3-2, BS EN 61000-3-3, ETSI EN 301 489-1, ETSI EN 301 489-17, BS EN 1838, BS EN ISO 7010, BS EN 62471, BS EN 60598-2-22			
Compliance Marking	UK CA CE			



FORM-20-SM-CM-RS-L10-HVG


Form 20M Exit, Surface Ceiling Mount, Rod Suspended, L10
Nanophosphate, Zoneworks Hive, All Pictograms, Double Sided,
Brushed Aluminium Frame

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1533050	Battery
8011956	LED Panel
UKM01870370002	Emergency Driver
8003345	Emergency Node

PRODUCT INFORMATION – DIMENSIONS

Blade Assembly (LxWxH mm)	220 x 18 x 110
Body/Box (LxWxH mm)	220 x 58 x 45
Rod/Cable (LxDIAØ mm)	1500 x 5
Cut-Out (LxW mm)	N/A
Minimum Depth (mm)	0
Weight (kg)	1.30

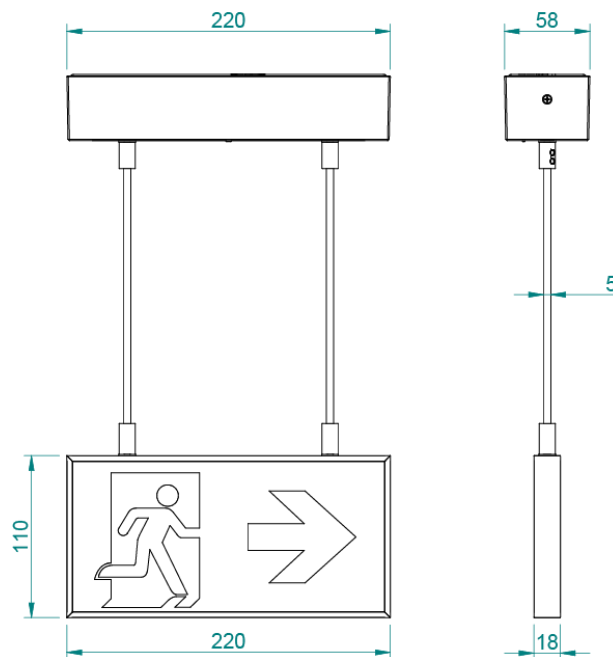

*The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications, or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order