



LFLLED-D2-BLK
Supalite Twin Spot Emergency, Surface Mount, L10 Nanophosphate, DALI-2
Emergency, Black



PRODUCT INFORMATION

Part Number	LFLLED-D2-BLK
MIC	AUT00000018901
Description	Supalite Twin Spot Emergency, Surface Mount, L10 Nanophosphate, DALI-2 Emergency, Black
Construction	Polycarbonate
Mounting	Surface Wall Mount & supplied with flex and plug (the flex and plug can be removed to allow for a hard-wired connection)
Dimensions	Main enclosure - 282mm (W) x 137mm (H) x 64mm (D) Total height including LED Heads 225mm
Weight	1.3kg
Operating Mode	Non-maintained
Testing System	DALI-2
Battery	Lithium Nanophosphate, 3.3V 5000mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	2 x LED Heads (adjustable), 185lm per lamp head
Operating Voltage	240V AC; 50Hz
Supply Current	0.034A
Power Factor	0.387
Power Consumption	0.7W (Standby), 2.5W (Max)
Inrush Current (Peak/Duration)	13.313A/66µs
Earth Leakage	0.318mA
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C ₀ =N/A C ₉₀ =N/A
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530230	Battery
8003508	Emergency Driver
1100956	LED Head, Left
1100957	LED Head, Right
8003062	Node

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order




LFLLED-D2-BLK

Supalite Twin Spot Emergency, Surface Mount, L10 Nanophosphate, DALI-2
Emergency, Black

Spacing Guidance

Polar curve for a single LED lamp head

Luminous emittance 1:

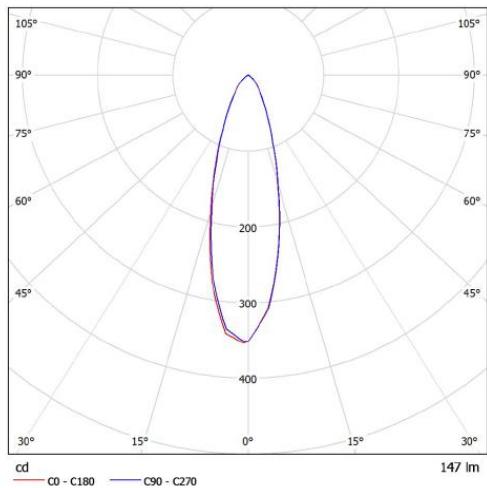

Isolux plot and value table for a 10m x 10m area serviced by an LFLLED with each LED lamp head tilted down 30°, rolled out 30°. LFLLED mounted on the wall at a height of 3m (values in lux).

