




## LLIFE-PRO-RECSP-HVG-BLK

Lifelight Pro IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks XT Hive, Black



PRODUCT INFORMATION					
Part Number	LLIFE-PRO-RECSP-HVG-BLK				
MIC	UKT00000003401				
Description	Lifelight Pro IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks XT Hive, Black				
Construction	PC/ABS Head				
Mounting	Recessed Ceiling				
Dimensions L x W x H	232mm x 40mm x 40mm (Control pack) 60mm Head diameter				
Cut-Out	51mm				
Minimum Depth	200mm				
Weight	1.1kg				
Operating Mode	Non-Maintained				
Testing System	Zoneworks XT HIVE (RF)				
Battery	Lithium Nanophosphate, 3.3V 5000mAh				
Charging Method	Intelligent Current Limited Constant Voltage				
Lamp(s)	Dual LED (Lifetime warranty on the lamp head and loom assembly)				
Operating Voltage	240V AC; 50Hz				
Power Consumption	0.7W (Standby), 3.0W (Max)				
Inrush Current (Peak/Duration)	12.1A / 87µs				
Earth Leakage	0.357mA				
Total lumen output	333lm				
Rated Emergency Duration	180 minutes				
IP Rating	IP44 (parts below ceiling), IP20 (parts above ceiling), see image below				
Operating Temperature	0°C to 40°C (LifeLight Head) 0°C to 60°C (Driver)				
Protection	<ul style="list-style-type: none"><li>• Battery overvoltage &amp; overcurrent protection</li><li>• Battery deep discharge protection</li><li>• Supply voltage polarity reversal protection</li><li>• Battery short-circuit protection (charging will resume upon removal of fault)</li><li>• Kit box (enclosure) of lamp controlgear provides protection against accidental contacts with live parts</li></ul>				
Luminaire Classification	<table border="1"><tr><td>X</td><td>0</td><td>ADF</td><td>180</td></tr></table>	X	0	ADF	180
X	0	ADF	180		
Conformity	BS EN 60598.2.22, BS 5266				

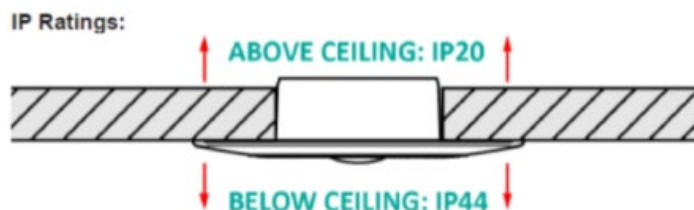



## LLIFE-PRO-RECSP-HVG-BLK

Lifelight Pro IP44 Splashproof Emergency, Recessed Mount, L10  
Nanophosphate, Zoneworks XT Hive, Black

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530232	Battery
1100766	LED Head Assembly
UKM01870140001 LLIFE-PRO-CKIT-HVG-415	Driver Pack
8003330	HVG Node

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order