




## LLIFE-PRO-RECSP-HVG

Lifelight Pro IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks XT Hive



| PRODUCT INFORMATION      |  |   |     |     |  |
|--------------------------|--|---|-----|-----|--|
| Part Number              | LLIFE-PRO-RECSP-HVG  |   |     |     |  |
| MIC                      | UKT01820060001   |   |     |     |  |
| Description              | Lifelight Pro IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks XT Hive   |   |     |     |  |
| Construction             | PC/ABS Head  |   |     |     |  |
| Mounting                 | Recessed Ceiling   |   |     |     |  |
| Dimensions L x W x H     | 232mm x 40mm x 40mm (Control pack)<br>60mm Head diameter   |   |     |     |  |
| Cut-Out                  | 51mm   |   |     |     |  |
| Minimum Depth            | 200mm  |   |     |     |  |
| Weight                   | 1.1kg  |   |     |     |  |
| Operating Mode           | Non-Maintained   |   |     |     |  |
| Testing System           | Zoneworks XT HIVE (RF)   |   |     |     |  |
| Battery                  | Lithium Nanophosphate, 3.3V 5000mAh  |   |     |     |  |
| Charging Method          | Intelligent Current Limited Constant Voltage   |   |     |     |  |
| Lamp(s)                  | Dual LED (Lifetime warranty on the lamp head and loom assembly)  |   |     |     |  |
| Operating Voltage        | 240V AC; 50Hz  |   |     |     |  |
| Power Consumption        | 0.7W (Standby), 3.0W (Max)   |   |     |     |  |
| Total lumen output       | 333lm  |   |     |     |  |
| Rated Emergency Duration | 180 minutes  |   |     |     |  |
| IP Rating                | IP44 (parts below ceiling), IP20 (parts above ceiling), see image below  |   |     |     |  |
| Operating Temperature    | 0°C to 40°C (LifeLight Head)<br>0°C to 60°C (Driver)   |   |     |     |  |
| Protection               | <ul style="list-style-type: none"><li>• Battery overvoltage &amp; overcurrent protection</li><li>• Battery deep discharge protection</li><li>• Supply voltage polarity reversal protection</li><li>• Battery short-circuit protection (charging will resume upon removal of fault)</li><li>• Kit box (enclosure) of lamp controlgear provides protection against accidental contacts with live parts</li></ul> |   |     |     |  |
| Luminaire Classification | X  | 0 | ADF | 180 |  |
| Conformity               | BS EN 60598.2.22, BS 5266  |   |     |     |  |

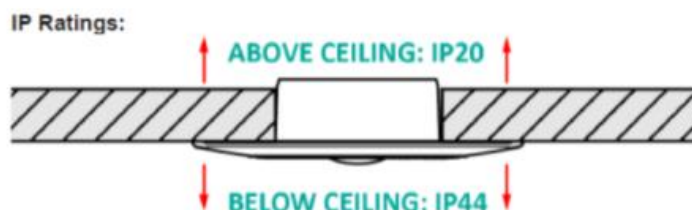



## LLIFE-PRO-RECSP-HVG

Lifelight Pro IP44 Splashproof Emergency, Recessed Mount, L10  
Nanophosphate, Zoneworks XT Hive

### REPLACEMENT PARTS

| PART NUMBER            | DESCRIPTION       |
|------------------------|-------------------|
| 1530232                | Battery           |
| 1100765                | LED Head Assembly |
| UKM01870140001         | Driver Pack       |
| LLIFE-PRO-CKIT-HVG-415 |                   |
| 8003330                | HVG Node          |

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.