



## LLIFE-RECSP-BLK

Lifelight IP44 Splashproof Emergency, Recessed Mount,  
L10 Nanophosphate, Clevertest Plus, Black



### PRODUCT INFORMATION

Part Number	LLIFE-RECSP-BLK
MIC	UKT0000005401
Description	Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Clevertest Plus, Black
Switchable Output	N/A
Material	PC/ABS Head
Mounting	Recessed Ceiling
Dimensions	232mm x 51mm x 42mm (Control Pack) 95mm Head Diameter
Weight	0.8kg
Operating Mode	Non-Maintained
Testing System	Clevertest Plus Enabled (Not activated by default)
Battery	Lithium Nanophosphate (LiFePO4), Clevertronics
Charging Method	Intelligent current limited constant voltage
Lamp(s)	Single LED (Lifetime warranty on the lamp head and loom assembly)
Operating Voltage	220-240V AC; 50Hz
Total Lumen Output	172lm
Power Consumption	1.0 Watts (Standby), 4.2 Watts (Max)
Supply Current	19.5mA (Standby), 25mA (Max)
Inrush Current (Peak/Duration)	0.3A / 3668µs
Earth Leakage	N/A
IP Rating	IP44 (Parts Below Ceiling), See Image Below, IP20 (Parts Above Ceiling), See Image Below
IK Rating	N/A
Operating Temperature	0°C to 40°C
Rated Emergency Duration	180 Minutes
Compliance Marking	
Luminaire Classification	X   0   AD   180
Conformity	BS EN 60598-2-22, BS 5266




## LLIFE-RECSP-BLK

Lifelight IP44 Splashproof Emergency, Recessed Mount,  
L10 Nanophosphate, Clevertest Plus, Black

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1533031	Battery
1100760	LED Strip
UKM01370040002 LLIFE-CKIT-450	Emergency Driver

IP Ratings:

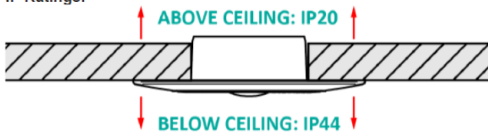

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order