



LLIFE-RECSP-CL-HVG-BLK

L10 Optimum Lifelight, High Performance, Recessed Emergency Light with IP44 Splash Proof Head and Corridor Lens, Black




PRODUCT INFORMATION

Part Number	LLIFE-RECSP-CL-HVG-BLK			
MIC	UKD01820040001			
Description	L10 Optimum Lifelight, High Performance, Recessed Emergency Light with IP44 Splash Proof Head and Corridor Lens, Black			
Construction	PC/ABS head			
Dimensions L x W x H	232mm x 51mm x 42mm (Control pack) 95mm Head diameter			
Ceiling Hole Cut-Out	85mm			
Minimum Ceiling Depth	120mm			
Operating Mode	Non-maintained			
Testing System	Zoneworks HIVE (RF) 2.4GHz			
Battery Type & Manufacturer	Lithium Nanophosphate, 3.3V 2500mAh (with battery sleeve), Clevertronics			
Charging Method	Intelligent current limited constant voltage			
Lamp(s)	1 x LED			
Operating Voltage	220-240V AC; 50Hz			
Supply Current	0.026A			
Power Factor	0.73			
Power Consumption	1.3 Watts (Standby), 4.5 Watts (Max)			
Total lumen output	152lm (Corridor Lens)			
Rated Emergency Duration	180 minutes			
IP Rating	IP44 (parts below ceiling) IP20 (parts above ceiling), see image below			
Operating temperature	0°C to 40°C			
Luminaire Classification	X	0	ADF	180
Compliance Marking	UK CA CE			
Conformity	BS EN 60598-2-22, BS 5266			

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1533031	Battery
1100762	LED Head Assembly
UKM01870010002	Emergency Driver
8003330	Node

IP Ratings:

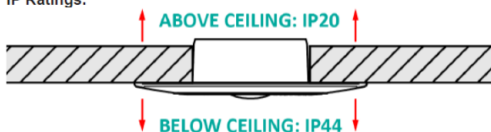

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice