




LLIFE-RECSP-CL-HVG

L10 Optimum Lifelight, High Performance, Recessed Emergency Light with IP44 Splash Proof Head and Corridor Lens



PRODUCT INFORMATION	
Part Number	LLIFE-RECSP-CL-HVG
MIC	UKD01820030001
Description	L10 Optimum Lifelight, High Performance, Recessed Emergency Light with IP44 Splash Proof Head and Corridor Lens
Construction	PC/ABS head
Dimensions L x W x H	232mm x 51mm x 42mm (Control pack) 95mm Head diameter
Ceiling Hole Cut-Out	85mm
Minimum Ceiling Depth	120mm
Operating Mode	Non-maintained
Testing System	Zoneworks HIVE (RF) 2.4GHZ
Battery Type & Manufacturer	Lithium Nanophosphate, 3.3V 2500mAh (with battery sleeve), Clevertronics
Charging Method	Intelligent current limited constant voltage
Lamp(s)	1 x LED
Operating Voltage	220-240V AC; 50Hz
Supply Current	0.026A
Power Factor	0.73
Power Consumption	1.3 Watts (Standby), 4.5 Watts (Max)
Total lumen output	152lm (Corridor Lens)
Rated Emergency Duration	180 minutes
IP Rating	IP44 (parts below ceiling) IP20 (parts above ceiling), see image below
Operating temperature	0°C to 40°C
Luminaire Classification	X 0 ADF 180
Compliance Marking	
Conformity	BS EN 60598-2-22, BS 5266

REPLACEMENT PARTS	
PART NUMBER	DESCRIPTION
1533031	Battery
1100760	LED Head Assembly
UKM01870010002	Emergency Driver
8003330	Node

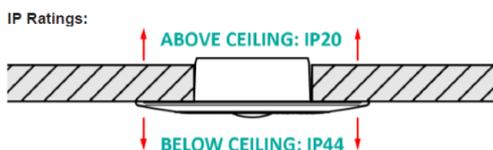

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice