




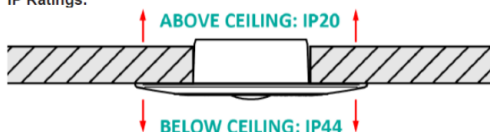
LLIFE-RECSP-D2

Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, DALI-2 Emergency, including optional Corridor lens



PRODUCT INFORMATION	
Part Number	LLIFE-RECSP-D2
MIC	UKT00000005101
Description	Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, DALI-2 Emergency, including optional Corridor Lens
Construction	PC/ABS head
Dimensions L x W x H	232mm x 51mm x 42mm (Control pack) 95mm Head Diameter
Ceiling Hole Cut-Out	80mm
Minimum Ceiling Depth	120mm
Operating Mode	Non-Maintained
Testing System	DALI-2
Battery Type & Manufacturer	Lithium Nanophosphate, 3.3V 2500mAh (with battery sleeve), Clevertronics
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	1 x LED
Total Lumen Output	172lm (Area Lens - fitted), 152lm (Corridor Lens – supplied in box)
Operating Voltage	220-240V AC; 50Hz
Power Consumption	1.3 Watts (Standby), 4.5 Watts (Max)
Inrush Current (Peak/Duration)	0.3A/3668µs
Earth Leakage	N/A
Rated Emergency Duration	180 minutes
IP Rating	IP44 (parts below ceiling) IP20 (parts above ceiling), see image below
Operating temperature	0°C to 40°C
Compliance Marking	
Luminaire Classification	X 0 A D 180
Conformity	BS EN 60598-2-22, BS 5266

IP Ratings:





LLIFE-RECSP-D2

Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, DALI-2 Emergency, including optional Corridor lens

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530031	Battery
1100760	Head Assembly
UKM01270120001 LLIFE-CKIT-D2-450	Emergency Driver
8003062	D2 Node

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order