



LLIFE-RECSP-HVG-BLK

Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks XT Hive, including optional Corridor lens, Black



PRODUCT INFORMATION	
Part Number	LLIFE-RECSP-HVG-BLK
MIC	UKD01820070001
Description	Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks XT Hive, including optional Corridor lens, Black
Construction	PC/ABS head
Dimensions L x W x H	232mm x 51mm x 42mm (Control pack) 95mm Head diameter
Ceiling Hole Cut-Out	85mm
Minimum Ceiling Depth	120mm
Operating Mode	Non-maintained
Testing System	Zoneworks XT HIVE (RF)
Battery Type & Manufacturer	Lithium Nanophosphate, 3.3V 2500mAh (with battery sleeve), Clevertronics
Charging Method	Intelligent current limited constant voltage
Lamp(s)	1 LED
Operating Voltage	220-240V AC; 50Hz
Power Consumption	1.0 Watts (Standby), 4.2 Watts (Max)
Total lumen output	172lm (Area Lens - fitted), 152lm (Corridor Lens – supplied in box)

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice




LLIFE-RECSP-HVG-BLK

Lifelight IP44 Splashproof Emergency, Recessed Mount, L10
Nanophosphate, Zoneworks XT Hive, including optional Corridor lens, Black

PRODUCT INFORMATION

Rated Emergency Duration	180 minutes
IP Rating	IP44 (parts below ceiling) IP20 (parts above ceiling), see image below
Operating temperature	0°C to 40°C
Protection	<ul style="list-style-type: none">• Battery overvoltage & overcurrent protection• Battery deep discharge protection• Supply voltage polarity reversal protection• Battery short-circuit protection (charging will resume upon removal of fault)• Kit box (enclosure) of lamp control gear provides protection against accidental contacts with live parts
Luminaire Classification	X 0 ADF 180
Conformity	BS EN 60598-2-22, BS 5266

IP Ratings:

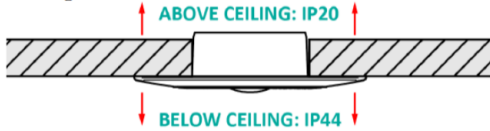

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1533031	Battery
1100762	LED Head Assembly
UKM01870010001 LLIFE-CKIT-HVG-450	Driver
8003330	HIVE Node

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice