




LLIFE-RECSP-HVG-BLK

Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks Hive, including optional corridor lens, Black



PRODUCT INFORMATION	
Part Number	LLIFE-RECSP-HVG-BLK
MIC	UKD01820070002
Description	Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks Hive, including optional corridor lens, Black
Material	PC/ABS Head
Mounting	Recessed Mount
Dimensions L x W x H	232mm x 51mm x 42mm (Control pack) 95mm Head diameter
Ceiling Hole Cut-Out	85mm
Minimum Ceiling Depth	120mm
Operating Mode	Non-Maintained
Testing System	Zoneworks Hive (RF) 2.4GHz
Battery	Lithium Nanophosphate, 3.3V 2500mAh (with battery sleeve)
Charging Method	Intelligent current limited constant voltage
Lamp(s)	1 x LED
Operating Voltage	220-240V AC; 50Hz
Total Lumen Output	172lm (Area Lens - fitted), 152lm (Corridor Lens – supplied in box)
Supply Current	0.026A
Power Factor	0.73
Power Consumption	1.3W/4.5W (Standby/Max)
Inrush Current (Peak/Duration)	0.3A/3668µs
Earth Leakage	N/A
IP Rating	IP44 (parts below ceiling) IP20 (parts above ceiling), see image below
Operating Temperature	0°C to 40°C
Rated Emergency Duration	180 minutes
Compliance Marking	
Appliance Class	Class II double insulated
Luminaire Classification	X 0 ADF 180
Conformity	BS EN 60598-2-22, BS 5266

IP Ratings:

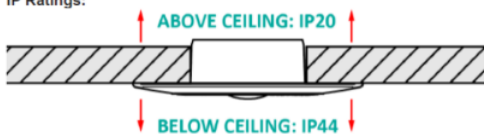



LLIFE-RECSP-HVG-BLK

Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks Hive, including optional corridor lens, Black

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1533031	Battery
1100762	LED Panel
UKM01870010002	Emergency Driver
8003330	Node

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order