



LLIFE-RECSP-HVG


Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks Hive



PRODUCT INFORMATION	
Part Number	LLIFE-RECSP-HVG
MIC	UKD01820020002
Description	Lifelight IP44 Splashproof Emergency, Recessed Mount, L10 Nanophosphate, Zoneworks Hive
Construction	PC/ABS head
Dimensions L x W x H	232mm x 51mm x 42mm (Control pack) 95mm Head diameter
Ceiling Hole Cut-Out	85mm
Minimum Ceiling Depth	120mm
Operating Mode	Non-maintained
Testing System	Zoneworks HIVE (RF) 2.4GHz
Battery Type & Manufacturer	Lithium Nanophosphate, 3.3V 2500mAh (with battery sleeve), Clevertronics
Charging Method	Intelligent current limited constant voltage
Lamp(s)	1 LED
Operating Voltage	220-240V AC; 50Hz
Supply Current	0.026A
Power Factor	0.73
Power Consumption	1.3 Watts (Standby), 4.5 Watts (Max)
Total lumen output	172lm (Area Lens - fitted)
Rated Emergency Duration	180 minutes
IP Rating	IP44 (parts below ceiling) IP20 (parts above ceiling), see image below
Operating temperature	0°C to 40°C
Luminaire Classification	X 0 ADF 180
Compliance Marking	
Conformity	BS EN 60598-2-22, BS 5266

REPLACEMENT PARTS	
PART NUMBER	DESCRIPTION
1533031	Battery
1100760	LED Head Assembly
UKM01870010002	Emergency Driver
8003330	Node

IP Ratings:

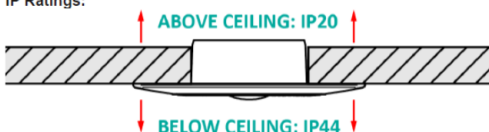

*Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice