



## LLIFE-RECSP

Lifelight IP44 Splashproof Emergency, Recessed Mount,  
L10 Nanophosphate, Clevertest Plus



PRODUCT INFORMATION					
Part Number	LLIFE-RECSP				
MIC	UKD01320010002				
Description	L10 Optimum Lifelight, High Performance, Recessed Emergency Light with IP44 Splash Proof Head, Enabled with Clevertest Plus				
Material	PC/ABS head				
Mounting	Recessed Ceiling				
Sensor Capability	N/A				
Dimensions	232mm x 51mm x 42mm (Control pack) 95mm Head diameter				
Ceiling Hole Cut-Out	85mm				
Minimum Ceiling Depth	120mm				
Weight	764.8g				
764.8 Operating Mode	Non-maintained				
Testing System	Clevertest Plus Enabled (Not activated by default)				
Battery	Lithium Nanophosphate, 3.3V 2500mAh				
Charging Method	Intelligent current limited constant voltage				
Driver	N/A				
Lamp(s)	Single LED (Lifetime warranty on the lamp head and loom assembly)				
Operating Voltage	220-240V AC; 50Hz				
Power Consumption	1.0 Watts (Standby), 4.2 Watts (Max)				
Inrush Current (Max)	0.3A @ 3668µs				
Earth Leakage	N/A				
IP Rating	IP44 (parts below ceiling), see image below				
IK Rating	IP20 (Parts above ceiling), see image below				
Operating Temperature	0°C to 40°C				
Rated Emergency Duration	180 Minutes				
Compliance Marking	<b>UK CA CE</b>				
Luminaire Classification	<table border="1"> <tr> <td>X</td> <td>0</td> <td>AD</td> <td>180</td> </tr> </table>	X	0	AD	180
X	0	AD	180		
Conformity	BS EN 60598-2-22, BS 5266				




## LLIFE-RECSP

Lifelight IP44 Splashproof Emergency, Recessed Mount,  
L10 Nanophosphate, Clevertest Plus

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1533031	Battery
1100760	LED Strip
UKM01370040002 LLIFE-CKIT-450	Emergency Driver

IP Ratings:

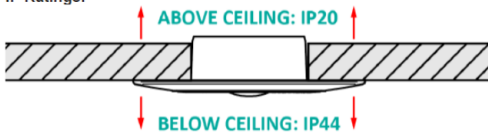

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order