LLIFEM-PRO-UPS

Lifelight Pro Emergency, Recessed Mount, Maintained, UPS controlled

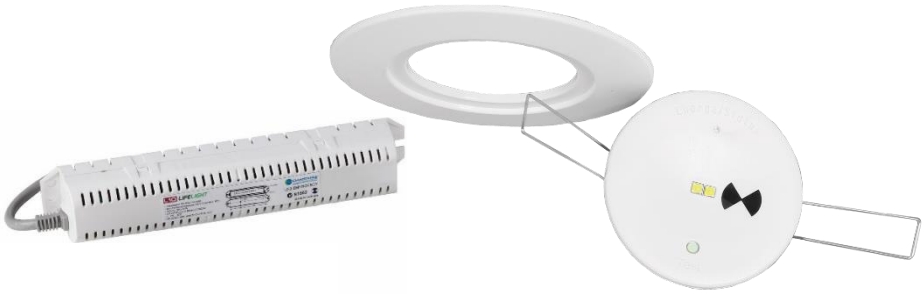

PRODUCT INFORMATION	
Part Number	LLIFEM-PRO-UPS
MIC	AUT01510030002
Description	Lifelight Pro Emergency, Recessed Mount, Maintained, UPS controlled
Construction	ABS head, PC/ABS control gear
Mounting	Recessed mount
Dimensions L x W x H	232mm x 40mm x 40mm (Control pack) 60mm head diameter (98mm with adaptor plate)
Ceiling Hole Cut-Out	51mm, 85mm (with adaptor plate)
Minimum Ceiling Depth	200mm, 120mm (with adaptor plate)
Weight	0.8kg
Operating Mode	If a 240V AC/DC supply is applied to the luminaire the LED lamp head will illuminate. To operate the fitting in Non-Maintained mode and external sensing relay (supplied by others) will be required to sense the loss of supply to the local lighting circuit and facilitate the changeover to the 240V AC/DC backup/UPS supply.
Testing System	N/A
Battery	N/A
Charging Method	N/A
Lamp(s)	Dual LED (Lifetime warranty on the lamp head and loom assembly)
Operating Voltage	240V AC; 50Hz (supplied with a 2 core and earth flex and plug)
Power Consumption	5W/5.5W (Min/Max)
Inrush Current (Peak/Duration)	12.093A / 87.3µs
Earth Leakage	0.361mA
IP Rating	IP20
Operating Temperature	1˚C to 40˚C
AS2293 Classification	C_0=D80 C_{90}=D80
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

REPLACEMENT PARTS	
PART NUMBER	**DESCRIPTION**
1100868	LED Head
AUM01570010001 LLIFEM-PRO-CKIT-UPS	Driver Pack

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order