




## LSBLED-HVG-BLK

Swingblade Exit, Surface Mount, L10 Nanophosphate, Zoneworks XT  
Hive, All Pictograms, Single or Double Sided, Black

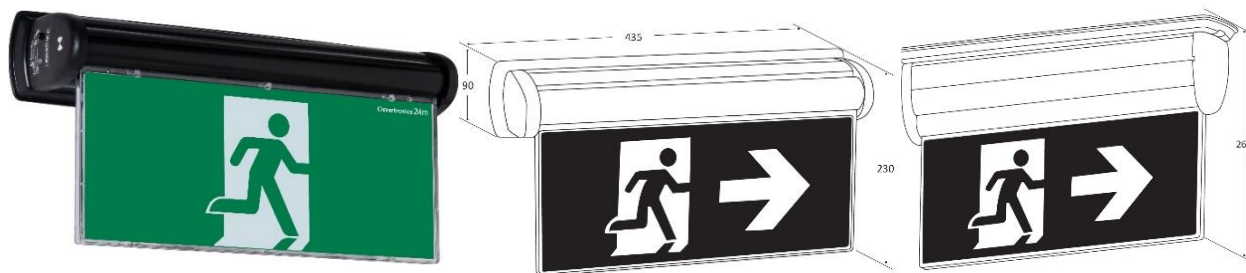

### PRODUCT INFORMATION

Part Number	LSBLED-HVG-BLK
MIC	AUA01910170001
Description	Swingblade Exit, Surface Mount, L10 Nanophosphate, Zoneworks XT Hive, All Pictograms, Single or Double Sided, Black
Construction	Metal frame, White End Caps with Acrylic & Polycarbonate Diffuser
Mounting	Wall or Ceiling mount on a slide connect bracket – Single & Double Sided NOTE: If product is suspended below the Ceiling or Mounted on a metal surface the Swingblade bracket cover plate accessory (P/N: 2740105) is required to cover the mains terminal
Dimensions L x W x H	See diagram above
Operating Mode	Maintained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Nanophosphate, 3.3V 2500mAh
Charging Method	Intelligent current limited constant voltage charger
Diffuser	All directional inserts included in the box
Lamp(s)	24 x High Intensity LED, Surface Mounted onto a Replaceable Lamp Bar – 100,000hour
Operating Voltage	240V AC: 50Hz
Power Consumption	3.8W (Standby), 5.6W (Max)
Inrush Current (Max)	TBD
Earth Leakage	0.315 mA
IP Rating	IP20
Operating Temperature	1° to 40°C
AS/NZ2293 Classification	C <sub>0</sub> =D6.3 C <sub>90</sub> =E3.2
Viewing Distance	24M
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530070	Battery
8002185	LED Srtip
8003211	EM Driver
8003560	RF Node

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.