




LUBPRO-RS-D2-BLK

Ultrablade Pro Exit, Recessed Ceiling Mount, Rod Suspended, L10 Nanophosphate, DALI Emergency, All Pictograms, Single or Double Sided, Black

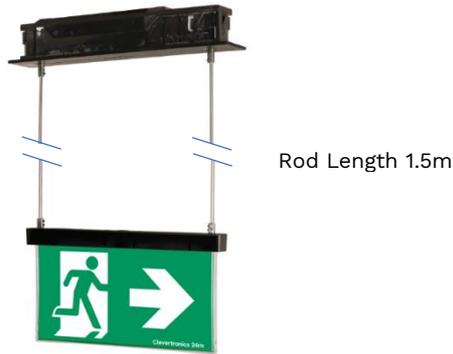

PRODUCT INFORMATION

Part Number	LUBPRO-RS-D2-BLK
MIC	AUA00000004101
Description	Ultrablade Pro Exit, Recessed Ceiling Mount, Rod Suspended, L10 Nanophosphate, DALI-2 Emergency, All Pictograms, Single or Double Sided, Black
Construction	PC/ABS body with PC Diffuser, Stainless Steel Rods
Mounting	Recessed Ceiling - Rod suspended Blade suspended with unpainted stainless-steel rods, secured by 2 x "grub-screws" at each end of the rod. Rod suspension system supplies power to the LED lamp bar mounted on top of blade. Steel Rods supplied with fitting assembly.
Dimensions L x W x H	Blade Assembly: 317mm x 8.7mm x 157mm Ceiling Mount Control Gear Enclosure: 347mm x 48mm x 65mm Ceiling Mount Cover Plate: 385mm x 67mm Rods: 1500mm x 5mm
Cut-Out	350mm x 48mm
Minimum Depth	80mm
Weight	1.5kg
Operating Mode	Maintained, supports 4-hour emergency duration
Testing System	DALI-2
Battery	Lithium Nanophosphate 3.3V 2.5Ah
Charging Method	Intelligent current limited constant voltage
Diffuser	All Directional Inserts Included
Lamp(s)	12 x Duris E3 LED, 100,000 hours
Operating Voltage	240V AC; 50Hz
Power Consumption	1.4W (Standby), 3.7W (Max)
Inrush Current (Max)	13.131A @ 66µS
Earth Leakage	0.345mA
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C0=E5 C90=E5
Viewing Distance	24m
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530050	Battery
AUM00000001401 LUBPRO-CKIT-D2	Driver Pack
8003062	DALI-2 Node

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order