




LUBPRO-SM-TH-D2-RU

Ultrablade Pro Exit, Surface Mount, L10 Nanophosphate, DALI-2 Emergency, Theatre Version, Running Man Arrow Up, Single Sided

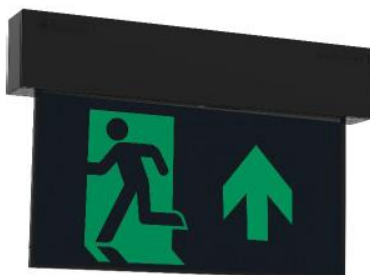

PRODUCT INFORMATION

Part Number	LUBPRO-SM-TH-D2-RU			
MIC	UKA00000001901			
Description	Ultrablade Pro Exit, Surface Mount, L10 Nanophosphate, DALI-2 Emergency, Theatre Version, Running Man Arrow Up, Single Sided			
Construction	PC/ABS body with PC Diffuser			
Mounting	Wall, Ceiling single-Sided & Ceiling Double-Sided			
Dimensions L x W x H	317mm x 8.7mm x 157mm (Blade Assembly) 360mm x 47mm x 72mm (Base)			
Weight	1.0kg			
Operating Mode	Maintained			
Testing System	DALI-2			
Battery	Lithium Nanophosphate, 3.3V 2500mAh			
Charging Method	Intelligent Current Limited Constant Voltage			
Diffuser	Theatre mask, Running man with Up Arrow			
Lamp(s)	12 x LED, 100,000 hours			
Operating Voltage	240V AC; 50Hz			
Power Consumption	1.8W (Standby), 3.9W (Max)			
Inrush Current (Peak/Duration)	13.08A/84µs			
Earth Leakage	0.331mA			
IP Rating	IP20			
IK Rating	N/A			
Operating Temperature	0°C to 40°C			
Viewing Distance	30m			
Rated Emergency Duration	180 minutes			
IP Rating	IP20			
Operating temperature	0°C to 40°C			
Luminaire Classification	X	1	AFG	180
Conformity	BS EN 60598-2-22, BS 5266			

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530030	Battery
8003168	Emergency Driver
8002178	LED Strip
8003062	DALI-2 Node

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order