

# WEATHERPROOF WALL MOUNT EXIT

## Weatherproof with a Variety of Viewing Distances

The Weatherproof Wall Mount exit is ideal for applications that require an IP66/67 rated exit that is available in 24m and 40m viewing distances.

Fitted with 100K hour LEDs and built with a robust polycarbonate base and diffuser it is perfect for applications in warehouses, factories and stadiums.



### Applications



Schools



Public Amenities



Factories



Stadiums



Car Parks



Warehouses

### Features and Benefits

- AS/NZS 2293.3 compliant
- Wall mount
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Various viewing distances (24m & 40m)



LED



LNP



24m



LFP



40m



IP66/67



Wall Mount



IK08/09

**LP** LITHIUM IRON  
PHOSPHATE  
PREMIUM  
PREMIUM PROJECT PERFORMANCE

**L10** LITHIUM  
NANOPHOSPHATE®  
OPTIMUM  
NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

# WEATHERPROOF WALL MOUNT EXIT

ORDERING INFORMATION		LP		L10	
TEST OPTIONS   PART #	Viewing Distance	24M ①	40M ②	24M ①	40M ②
	Standard	CWELED-WM	CJWELED-40-WM-R	LWELED-WM	LJWELED-40-WM-R
	Clevertest Plus System/ Self-Test Capable	Yes			
	DALI	CWELED-DALI-WM	CJWELED-DALI-40-WM-R	LWELED-DALI-WM	LJWELED-DALI-40-WM-R
	Zoneworks® XT Hive	CWELED-HV-WM	CJWELED-40-HV-WM-R	LWELED-HV-WM	LJWELED-40-HV-WM-R
Carton Quantity		1			
Weight - single (carton)		2.8kg	5.4kg	2.8kg	5.4kg
Dimensions (L x W x H)		380mm x 130mm x 190mm	560mm x 130mm x 280mm	380mm x 130mm x 190mm	560mm x 130mm x 280mm
Directional Options		Diffuser Options for 40m Only - add, R Right, L Left eg CJWELED-40-WM-R for Running Man, Arrow Right.			

POWER, LAMPS AND BATTERY		24M ①	40M ②	24M ①	40M ②
Power Consumption (Standby / Max)		2.7W / 5.1W	3.0W / 5.0W	2.5W / 4.8W	2.8W / 5.3W
Lamp(s)		100,000hrs LEDs			
Battery		Lithium Iron Phosphate		Lithium Nanophosphate®	
Voltage (V) / Capacity (mAh)		3.2V / 1500mAh		3.3V / 2500mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage			

TECHNICAL SPECIFICATIONS		SPARE PARTS		24M ①	40M ②	24M ①	40M ②
Operating Mode		Maintained					
Voltage (V) Frequency (Hz)		240V AC / 50Hz					
Construction - Body / Diffuser		PC / PC					
Mounting Type		Wall mount Single Sided					
Operating Temperature		1°C to 40°C					
Ingress Protection Rating (IP)		IP66/67					
Impact Rating (IK)		IK08 (Side) & IK09 (Front)					
		CLASSIFICATION		24M ①	40M ②	24M ①	40M ②
		C0		E1.25	E1.6	E1.25	E1.6
		C90		E1	E1.25	E1	E1.25

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E1	3.7	0.0	0.0	0.0	N/A	N/A	N/A	N/A	N/A
E1.25	4.1	4.1	0.0	0.0	0.0	0.0	N/A	N/A	N/A
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.


\*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

## Product Configuration:

- 24m Exit Sign
- 40m Exit Sign

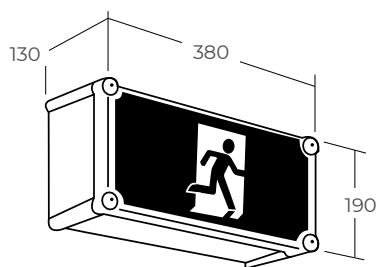

1

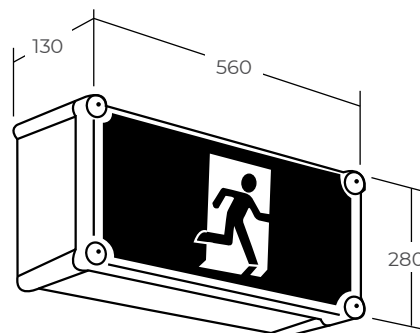

2

Dimensions (mm)

**clevertronics.co.nz**  
**clevertronics.com.au**

1 Caribbean Drive, Scoresby VIC 3179  
P +61 3 9559 2700 F +61 3 9559 2799 E [info@clevertronics.com.au](mailto:info@clevertronics.com.au)

Clevertronics is committed to continuously improving its products.  
All features and specifications are subject to change without prior notice.  
\_PRODUCT SHEETS – ANZ Weatherproof Wall Mount

