

# WEATHERPROOF UNIVERSAL 40M JUMBO EXIT



## Weatherproof Jumbo Exit for Larger Viewing Distances

The Weatherproof Universal Jumbo Exit is ideal for applications that require an IP66 rated exit for 40m viewing distance applications.

Featuring a robust housing with slide in diffusers and back plates for single and double sided configurations, the Weatherproof Universal Jumbo Exit is easy to install as a wall or ceiling mounted exit.

### Applications



Warehouses



Stadiums



Factories



Halls



Car Parks



Train Stations



### Features and Benefits

- AS/NZS 2293.3 compliant
- Wall and ceiling mount
- Single and double sided
- Includes all directional inserts
- IP66
- IK09
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible



# WEATHERPROOF UNIVERSAL 40M JUMBO EXIT

ORDERING INFORMATION		LP	L10
TEST OPTIONS / PART#	Standard	CJWELED-40	LJWELED-40
	Clevertest Plus System compatible	Yes	Yes
	DALI	CJWELED-40-DALI	LJWELED-40-DALI
	Zoneworks® XT Hive	CJWELED-40-HV	LJWELED-40-HV
Carton Quantity		1	
Weight - Single (Carton)		5.6kg (5.6kg)	
Dimensions (L x W x H)		570mm x 117mm x 340mm	
Directional Options		All Directional Inserts Included in the Box	

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)		2.8W / 4.8W	
Lamp(s)		100,000 Hour LED	
Battery type		Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 3200mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage	


TECHNICAL SPECIFICATIONS		CLASSIFICATION	LP	L10
Operating Mode	Maintained		D6.3	D6.3
Voltage (V) (Frequency (Hz))	220-240V (50Hz)		E4	E4
Construction - Body / Diffuser	Polycarbonate			
Viewing Distance	40m			
Mounting Type	Wall & Ceiling / Single & Double Sided			
Operating Temperature	0°C to 40°C			
Ingress Protection Rating (IP)	IP66			
Impact Rating (IK)	IK09			

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
D6.3	8.5	8.8	8.9	9.1	9.1	9.2	9.1	9.0	8.7
E4	6.2	6.6	6.9	7.1	7.3	7.4	7.4	0.0	0.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:  
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux.  
 Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1.  
 Spacing classifications do not apply for theatre versions.

\*Warranty information located at:  
<https://clevertronics.com.au/warranty-statement/>

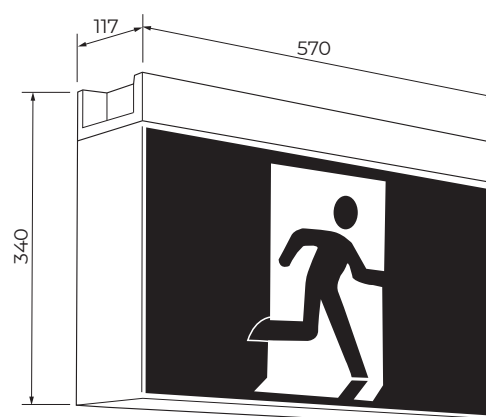

Dimensions (mm)

**clevertronics.co.nz**  
**clevertronics.com.au**

1 Caribbean Drive, Scoresby VIC 3179  
 P +61 3 9559 2700 F +61 3 9559 2799 E [info@clevertronics.com.au](mailto:info@clevertronics.com.au)

Clevertronics is committed to continuously improving its products.  
 All features and specifications are subject to change without prior notice.  
 \_PRODUCT SHEETS – ANZ Jumbo LED Weatherproof 05MAY23

