




## DYGC-UP-CM-RL

CLEVEREVAC DYNAMIC GREEN CEILING MOUNT BLADE EXIT SIGN

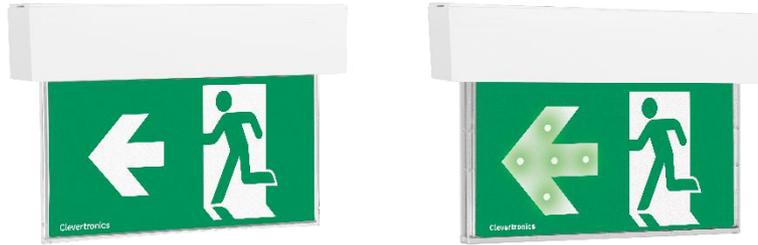

### PRODUCT INFORMATION

|                          |                                                                                                                                                                                                                                      |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Part Number              | DYGC-UP-CM-RL                                                                                                                                                                                                                        |
| MIC                      | AUA02550610001                                                                                                                                                                                                                       |
| Description              | LP Premium CleverEVAC Dynamic Green Blade EXIT sign, with Volt Free (VF) or 24V interface for ON/OFF activation of Dynamic Green Enhancement. Dynamic GREEN default set to activate upon mains power fail.                           |
| Construction             | PC/ABS body with PC diffuser                                                                                                                                                                                                         |
| Mounting                 | Ceiling Mount, Single-sided                                                                                                                                                                                                          |
| Dimensions L x W x H     | 391mm x 90mm x 257mm                                                                                                                                                                                                                 |
| Operating Mode           | Maintained – Sequencing inward green LEDs activated over XT HIVE Network or on VF/24V input trigger and capable of being activated in power-on and battery-backed mode. Dynamic GREEN default set to activate upon mains power fail. |
| Testing System           | Manual                                                                                                                                                                                                                               |
| Battery                  | Lithium Iron Phosphate, 3.2V 3200mAh                                                                                                                                                                                                 |
| Charging Method          | Intelligent current limited constant voltage                                                                                                                                                                                         |
| Diffuser                 | Pictograph, Single element (Running Man)                                                                                                                                                                                             |
| Lamp(s)                  | LED panel, 100,000 hours                                                                                                                                                                                                             |
| Operating Voltage        | 240V AC; 50Hz                                                                                                                                                                                                                        |
| Power Consumption        | 1.8 Watts (Standby), 4.7 Watts (Max)                                                                                                                                                                                                 |
| IP Rating                | IP20                                                                                                                                                                                                                                 |
| Operating Temperature    | 1°C to 40°C                                                                                                                                                                                                                          |
| AS2293 Classification    | C0=E2.5 C90=E8                                                                                                                                                                                                                       |
| Viewing Distance         | 24m                                                                                                                                                                                                                                  |
| Applicable Standards     | AS/NZS3820, CISPR15, AS/NZS2293.3                                                                                                                                                                                                    |
| Compliance Marking (RCM) |                                                                                                                                                                                                                                      |

### REPLACEMENT PARTS

| PART NUMBER                    | DESCRIPTION                                          |
|--------------------------------|------------------------------------------------------|
| 1550050                        | BATT:LP 3.2V 3200mAh 70mm lead, no BRKT              |
| AUM02570020001<br>DYGC-UP-CKIT | DRIVER PACK: Dynamic Green, UB Pro, Control Only, LP |

**Disclaimer:** Clevertronics Pty Ltd is a vendor of CleverEVAC products. It is not a fire engineer or designer. It does not purport to recommend its products for use in any particular application or to achieve any particular outcome. Purchasers and users of its products must take their own steps to ensure compliance with statutory requirements, safe practice and suitable application of the products.