



## FORM-16-REC-CM-RS-L10-HV

Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, L10 Nanophosphate, Zoneworks XT Hive, All Pictograms, Double Sided, Brushed Aluminium Frame



### PRODUCT INFORMATION - GENERAL

<b>Product Code</b>	FORM-16-REC-CM-RS-L10-HV
<b>MIC</b>	AUA01810930001
<b>Description</b>	Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, L10 Nanophosphate, Zoneworks XT Hive, All Pictograms, Double Sided, Brushed Aluminium Frame
<b>Construction</b>	PCM Box with PC/Aluminium Extrusion Blade
<b>Diffuser</b>	Polycarbonate
<b>Mounting</b>	Recessed Ceiling Mount, Double Sided
<b>Electrical Connection</b>	Push Terminal

### PRODUCT INFORMATION - SPECIFICATIONS

<b>Viewing Distance</b>	16m
<b>Operating Mode</b>	Maintained
<b>Testing System</b>	Zoneworks XT HIVE (RF)
<b>Battery</b>	Lithium Nanophosphate, 3.3V 2500mAh
<b>Charging Method</b>	Intelligent Current Limited Constant Voltage
<b>Lamp(s)*</b>	18 x LED, >100,000hrs (AS/NZS2293.3 LSL=73Y/00M)
<b>Supply Voltage</b>	220-240V~ 50Hz
<b>Power Factor</b>	0.28 (Standby, Maintained), 0.42 (Max)
<b>Supply Current</b>	19.91 (Standby, Maintained), 35.60 (Max) - (mA)
<b>Inrush Current (Max)</b>	10A<144μs
<b>Earth Leakage</b>	0.35mA
<b>Power Consumption</b>	1.5W (Standby), 3.6W (Max)
<b>Operating Temperature</b>	1 °C - 40°C
<b>IP Rating</b>	IP20
<b>Impact Rating</b>	IK03
<b>Escape Route Illumination</b>	N/A
<b>AS2293 Classification</b>	N/A



## FORM-16-REC-CM-RS-L10-HV

Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, L10  
Nanophosphate, Zoneworks XT Hive, All Pictograms, Double Sided,  
Brushed Aluminium Frame

### PRODUCT INFORMATION - COMPLIANCE


Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking	

### REPLACEMENT PARTS

COMPONENT	PART NUMBER & DESCRIPTION
1530050	Battery
AUM01870790001 LLEDDRV2CH-RR-2C170-6C30-15-CKIT-HVEXTA	Emergency Driver
8011958	LED Strip
8003182	RF Node

### PRODUCT INFORMATION - DIMENSIONS

Blade Assembly (LxWxH mm)	220 x 18 x 110
Body/Box (LxWxH mm)	225 x 63 x 53
Cover Plate (LxW mm)	277 x 99
Rod/Cable (LxDIAØ mm)	1500 x 5
Cut-Out (LxW mm)	230 x 65
Minimum Ceiling Depth (mm)	70
Weight (kg)	1.20

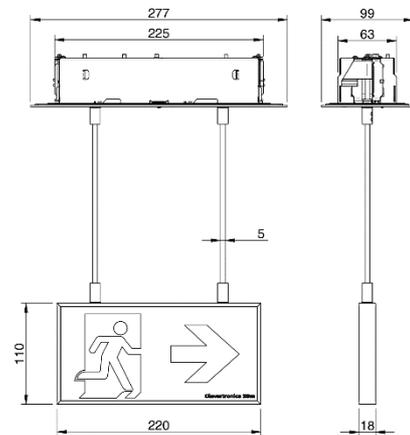

\*The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications, or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order