



FORM-16-REC-CM-RS-LP-HV

Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, LP, Zoneworks XT Hive, All Pictograms, Double Sided, Brushed Aluminium Frame



PRODUCT INFORMATION - GENERAL

Product Code	FORM-16-REC-CM-RS-LP-HV
MIC	AUA02810520001
Description	Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, LP, Zoneworks XT Hive, All Pictograms, Double Sided, Brushed Aluminium Frame
Construction	PCM Box with PC/Aluminium Extrusion Blade
Diffuser	Polycarbonate
Mounting	Recessed Ceiling Mount, Double Sided
Electrical Connection	Push Terminal

PRODUCT INFORMATION - SPECIFICATIONS

Viewing Distance	16m
Operating Mode	Maintained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Iron Phosphate, 3.2V 1100mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)*	18 x LED, >100,000hrs (AS/NZS2293.3 LSL=73Y/00M)
Supply Voltage	220-240V~ 50Hz
Power Factor	0.28 (Standby, Maintained), 0.42 (Max)
Supply Current	19.91 (Standby, Maintained), 35.60 (Max) - (mA)
Inrush Current (Max)	10A<144μs
Earth Leakage	0.35mA
Power Consumption	1.5W (Standby), 3.6W (Max)
Operating Temperature	1 °C - 40°C
IP Rating	IP20
Impact Rating	IK03
Escape Route Illumination	N/A
AS2293 Classification	N/A



FORM-16-REC-CM-RS-LP-HV

Form 16M Exit, Recessed Ceiling Mount, Rod Suspended, LP,
Zoneworks XT Hive, All Pictograms, Double Sided, Brushed
Aluminium Frame

PRODUCT INFORMATION - COMPLIANCE

Applicable Standards AS/NZS3820, CISPR15, AS/NZS2293.3

Compliance Marking

REPLACEMENT PARTS

COMPONENT	PART NUMBER & DESCRIPTION
-----------	---------------------------

1550150	Battery
---------	---------

AUM02870770001	Emergency Driver
----------------	------------------

8003182	Emergency Node HIVE
---------	---------------------

PRODUCT INFORMATION - DIMENSIONS

Blade Assembly (LxWxH mm)	220 x 18 x 110
----------------------------------	----------------

Body/Box (LxWxH mm)	225 x 63 x 53
----------------------------	---------------


Cover Plate (LxW mm)	277 x 99
-----------------------------	----------

Rod/Cable (LxDIAØ mm)	1500 x 5
------------------------------	----------

Cut-Out (LxW mm)	230 x 65
-------------------------	----------

Minimum Ceiling Depth (mm)	70
-----------------------------------	----

Weight (kg)	1.20
--------------------	------

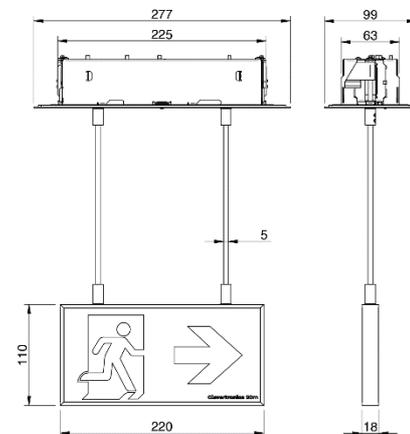

*The projected value has been calculated by extrapolation of the LM80 data using the Energy Star Calculator

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications, or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order